



INSTRUCTION

Calido
742129.002



RZB
LIGHTING

~ 220 - 240 V 50/60 Hz IP 20



742129.002

D 50, H 132

180 g



LED

1 x 10,5 W

12 W

1150 lm

CCT

CRI

EEK


EEK

2800 K

80

A++

A++



4,38 A / 24 µs

11

18

22

36



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE



DIN EN 61340-5-1



EN 12464
EN 13201









EN 12464




2019-05-20

www.rzb.de

1

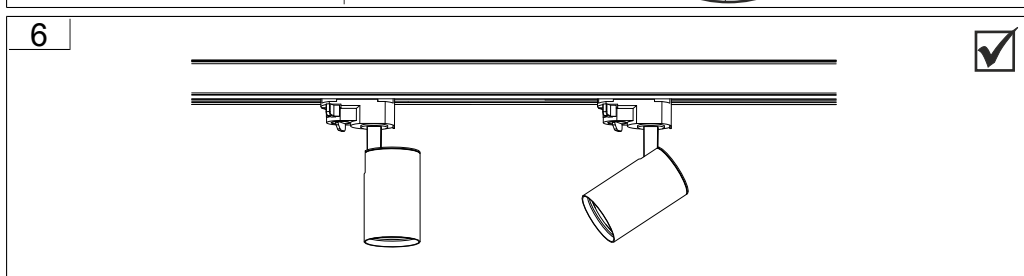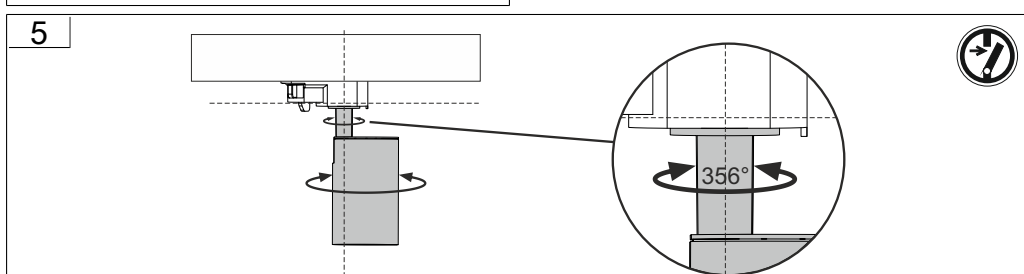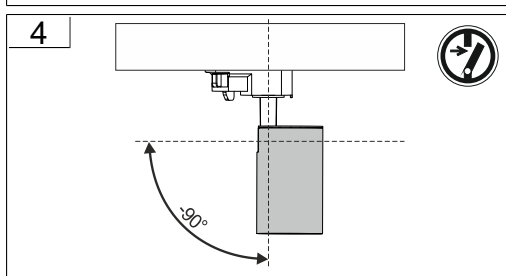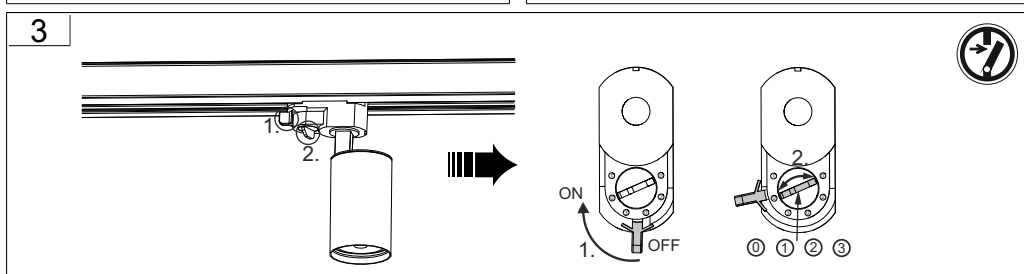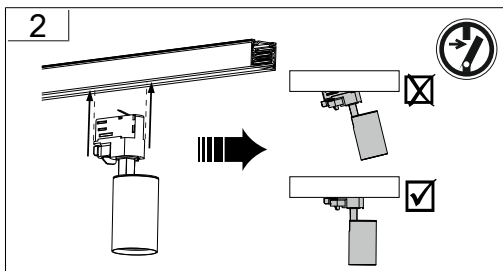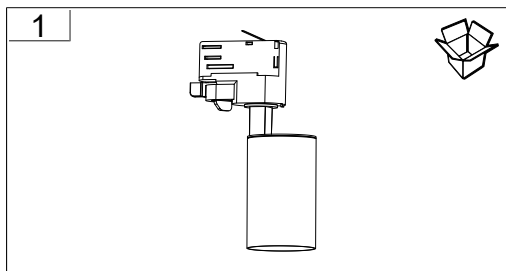



Clickbeam


	I_n	Power factor / Leistungsfaktor
742129.*	58 mA	> 0,9
742130.*	116 mA	> 0,9
742131.*	179 mA	> 0,9
742132.*	237 mA	> 0,9

Only to be installed outside
arms reach. /

Nur zur Installation außerhalb
des Handbereichs vorgesehen.

Die in dieser Leuchte enthaltene Lichtquelle darf nur vom Hersteller oder seinem Kundendienst oder einer ähnlich qualifizierten Person ersetzt werden. /

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



982448.003

D 47, H 4,

1 g







RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16
96052 Bamberg

Telefon: 0951/7909-0
Telefax: 0951/7909-198

E-mail: info@rzb-leuchten.de