

SIEMENS

Ingenuity for life



**SIRIUS
Monitor**

Monitoring, Controlling and Switching with SIRIUS Relays

One range for every application

[siemens.com/relays](https://www.siemens.com/relays)

The full-range SIRIUS relay portfolio

Every engineer knows that he must be completely up to date when it comes to controls, load feeders and drives. However, with coupling, control and monitoring relays, the search among the various suppliers becomes time-consuming. This is now a thing of the past because we have combined all these products in a single range: SIRIUS®. This makes it easy for you to select the optimum product and guarantees a top price-performance ratio.


SIRIUS relays – one range for every application

Our range of SIRIUS relays comprises everything required for motor feeder applications. With maximum ease and comfort. From a single source. Whether compact timing or reliable monitoring relays, particularly narrow coupling relays, plug-in relays, low-noise power relays or signal converter our relay range is the most complete and comprehensive portfolio on the market. We offer relays for each and every application. Moreover, all SIRIUS relays offer outstanding ease of operation. Take a closer look at our portfolio and convince yourself. You will be surprised.

The highlights at a glance

- **Broad applicability** – comprehensive portfolio
- **User-friendly** – easy operation
- **Multi-functional** – flexibly applicable relays
- **Practice-oriented** – graded for customized performance
- **Open communication with the control** – thanks to IO-Link interface
- **Excellent cost/performance ratio**

Use of SIRIUS relays

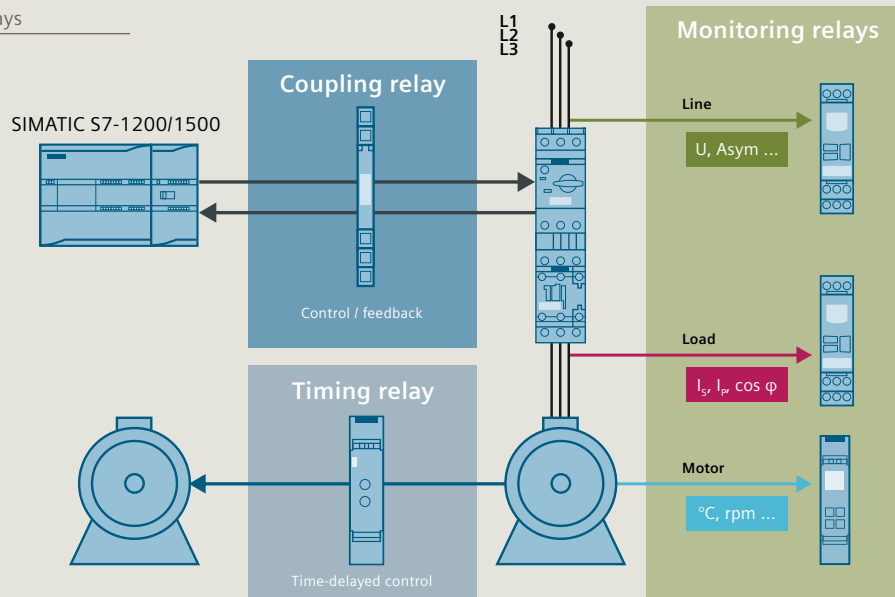

Content



SIRIUS timing relays: Full control of all time sequences

Timing relays	3RP20/25 and 7PV15 timing relays for DIN rail mounting	6	2–3*
Function modules	3RA2811 / 12 / 16, 3RA2831 / 32 function modules for mounting on 3RT2 contactors	8	4*
Time-delayed auxiliary switches	3RA2813 / 14 / 15 time-delayed auxiliary switches for mounting on 3RT2 contactors	9	5*

SIRIUS monitoring relays: Perfect protection of machines and systems

Monitoring relays	3UG451 / 461 / 463 monitoring relays for line and single-phase voltage monitoring – as 3UG481 / 483 also for IO-Link	10	6*
	3RR21/22 monitoring relays for direct mounting on contactors for multi-phase current monitoring – as 3RR24 also for IO-Link	12	7*
	3UG4621 / 4622 / 4641 monitoring relays for single-phase current monitoring, power factor and active current monitoring – as 3UG4822 / 4841 also for IO-Link	13	8*
	3UG4625 monitoring relays for residual current monitoring – as 3UG4825 also for IO-Link	14	9*
	3UG458 monitoring relays for insulation monitoring	15	9*
	3UG4501 monitoring relays for level monitoring	16	10*
	3UG4651 monitoring relays for speed monitoring – as 3UG4851 also for IO-Link	17	10*
	3UG546 DC load monitoring relays with Profinet	18	10*
Thermistor motor protection relays	3RN2 thermistor motor protection relays for protection against overheating	20	11*
Temperature monitoring relays	3RS25 temperature monitoring relays (analog adjustable)	22	12*
	3RS26/28/29 temperature monitoring relays (digital-adjustable) also for IO-Link	23	12*

SIRIUS coupling relays: Perfect interaction of control and system

Coupling relays	Force-guided 3RQ1 coupling relays up to SIL 3 / PL e	24	14*
	3RQ2 coupling relays in industrial enclosure, universal	25	14*
	3RQ3 coupling relays with a slimline, compact design	26	14*
	LZS coupling relays with plug-in relays	28	15*
Signal converters	3RS70 signal converters (standard signal and universal converters)	29	18*
Power relays	3TG10 power relays for high performance with minimum dimensions	30	19*

* Technical annex

SIRIUS Monitoring Relays for IO-Link

Reliable monitoring and protection

SIRIUS relays from Siemens offer maximum machine and system protection and now also communicate with the control level thanks to IO-Link. The new SIRIUS relays for IO-Link monitor line quality, current values, voltages, speeds and temperatures with the known reliability while supporting an even broader application area.

SIRIUS speaks IO-Link

With the SIRIUS monitoring relays for IO-Link, you opt for maximum flexibility: In addition to the unchanged autonomous monitoring function, measured values and data can be directly transferred to the control via IO-Link. Also parameterization can either be realized locally or via IO-Link. The SIRIUS relays for IO-Link are thus fully integrated in Totally Integrated Automation, our open system architecture for integrated automation. Moreover, you will benefit from considerably eased device replacement – thanks to data comparison and automatic re-parameterization via parameter servers.


Your advantages

- Precise monitoring of electrical, mechanical and temperature values
- Reliable protection of motors and system components
- Realization of simple autonomous temperature control tasks (2-point, 3-point control)
- Connection to the control level via IO-Link
- Central fault diagnostics and localization
- Easy servicing thanks to automatic configuration following maintenance or replacement
- Fast commissioning thanks to automatic data import following one-off parameterization
- Efficient energy management with SIRIUS 3UG48: Support of the data formats defined in the PROFIenergy profile

SIRIUS monitoring relays for IO-Link:

- **SIRIUS 3RR24:** 3-phase current monitoring directly integrated in the load feeder
- **SIRIUS 3UG48:** Monitoring of electrical and mechanical parameters: Voltage, current, power factor and speed
- **SIRIUS 3RS28:** Monitoring of temperatures

Unique consistency: IO-Link integrated in Totally Integrated Automation

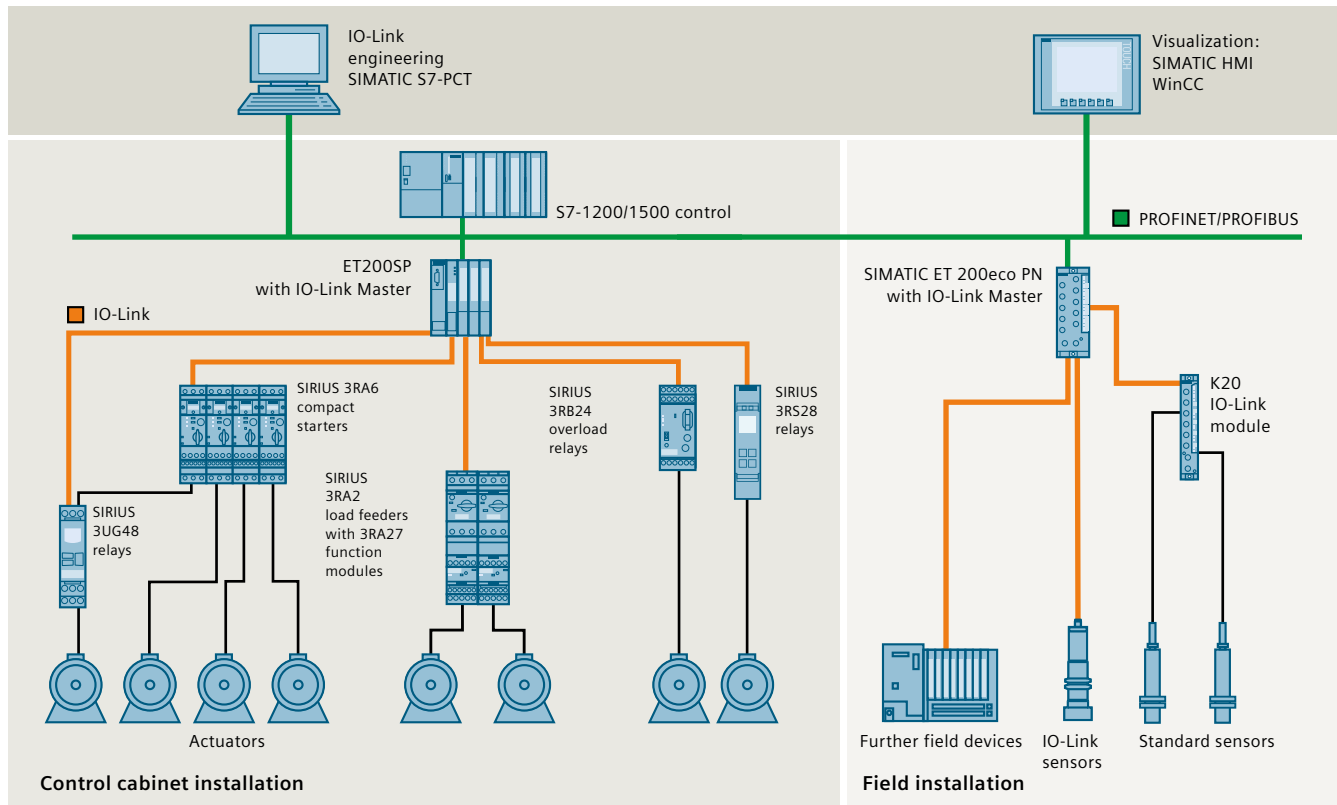



3RP20/25 and 7PV15 Timing Relays

for DIN rail mounting

Electronic timing relays are used for all time-delayed switching processes in control, starting, protection and regulation circuits. Thanks to their elaborate operating concept and space-saving, compact design, the 3RP20/25 timing relays are ideal timing devices for manufacturers of industrial control cabinets, power distribution boards and controls. With their narrow design, the 7PV15 timing relays are particularly suitable for applications in heaters, fans, air-conditioning systems and compressors.



Application

ON-delay

- Interference pulse suppression (gating of interference pulses)
- Successive motor starting to prevent mains overloads

OFF-delay

- Generation of overtravel functions after disconnection of the control voltage (e.g. fan run-on)
- Successively delayed disconnection of motors, fans, etc., for targeted system shutdown

Wye(star)-delta

- Motor start-up with reduced starting current in wye (star) circuit
- Switchover to delta operation for full motor power after adjustable time
- Short switchover break to prevent interphase short circuit with delayed contactor switching

Multifunction

- Maximum flexibility: one device with wide-range supply for all time functions
- Versions for railway applications for special requirements (e.g. temperature range, vibration/shock resistance and EMC)

Watchdog function

- Monitoring of cyclic events

Your advantages

- The right construction type for any application
- Compact range for all applications thanks to multifunctional devices and wide voltage range
- Significant logistical advantages thanks to versions with wide voltage and wide time setting ranges
- DIN rail mounting and disassembly without tools
- Cadmium-free relay contacts
- Recyclable, halogen-free enclosure

3RP25 timing relays

- Short cycle times and bounce-free and wear-free switching thanks to timing relays with semiconductor output
- Adhesive films are used to document the function set on the multifunctional timing relay
- Sealable cover for safeguarding of set parameters
- Force-guided contacts for increased safety without additional coupling relay (e.g. reliable detection of switching faults or safe signal duplication)

7PV15 timing relays

- Minimum variance: One design both for power distribution boards and control cabinets
- Compliance with EMC requirements for residential areas
- Switchover break with wye(star)-delta adjustable from 50 ms to 1 sec, for optimum adjustability to the application



Applications of the 3RP20/25 and 7PV15 ranges

3RP20 – the timing relay in contactor design:

Recommended for small distance between DIN rails and/or low installation depths, e.g. in control boxes

3RP25 – the premium range for all applications in industrial-standard width 22.5 mm and space-saving 17.5 mm:

for variable use thanks to versions with 1 or 2 relays, screw and spring-type terminals, force-guided operation, etc.

7PV15 – the version for standard applications:

Narrow and cost-favorable, both for control cabinets and power distribution boards

3RA2811/12/16, 3RA2831/32 Function Modules

for mounting on 3RT2 contactors

The function modules facilitate the mounting of starters and contactor assemblies for direct-on-line and wye(star)-delta starting. They comprise all important control functions required for the respective feeder – e.g. timing and electric interlocking function. The function modules, which act as timing relays, can be rapidly and easily mounted on SIRIUS contactors – without laborious wiring. They support contactor switching both with ON- and OFF-delay.



Application

ON-delay

- Time-delayed starting of multiple drives for example reduces the summation starting current and thus prevents the occurrence of line voltage dips or cable overloads (cascade circuit)

OFF-delay


- Time-controlled disconnection of a drive's control signal after a start pulse, e.g. with gate control, follow-up ventilation

Function modules for wye(star)-delta start

- Switchover during drive starting, e.g. switchover of large fans from wye (star) to delta as current-limiting measure
- Fixed switchover break of 50 ms for short-circuit protection
- Universal use thanks to wide voltage and large setting range of the wye (star) start time

Your advantages

- Reduction of control circuit wiring
- Prevention of wiring faults
- 24–240 V AC/DC wide voltage range for control supply voltage and contactor coil control
- Reduced testing costs
- Realization of control-independent timing functions
- Space savings in the control cabinet (compared to a separate timing relay)
- No additional protective circuit required (integrated varistor)
- Automatic preference circuit with wye(star)-delta function modules for further reduction of current peaks
- Assembly of wye(star)-delta starters, including timing function and electric interlocking, without additional wiring
- Approvals in accordance with IEC, CCC, UL and CSA standards

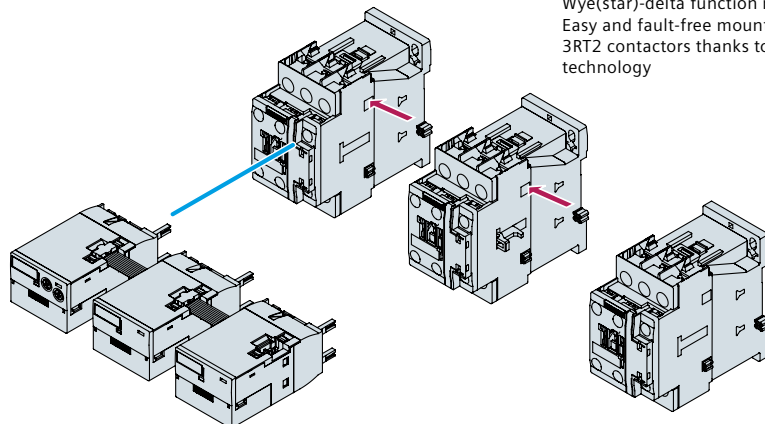

Wye(star)-delta function module:
Easy and fault-free mounting on
3RT2 contactors thanks to plug-in
technology

3RA2813/14/15 Time-Delayed Auxiliary Switches

for mounting on 3RT2 contactors

The electronically delayed auxiliary switches for mounting onto contactors are dimensioned for contactor coil voltages from 24 to 240 V AC/DC (wide voltage). Auxiliary switches for control and status signals are employed especially for the switching of very small signals for electronic applications. They are used for example for pump or fan run-on similar to OFF-delay timing relays or the delayed switch-on of a gate drive. Both the electrical and mechanical connection are realized by simply snapping the device on and locking it. A varistor is integrated in the time-delayed auxiliary switch for the attenuation of switching overvoltages in the contactor coil.



Application

ON-delay

- For example for the delayed readiness signaling of a drive after start-up with centrifugal mass

OFF-delay

- Generation of run-on functions for fans or pumps after disconnection of the control voltage

Your advantages

- Flexible use for all contactor control supply voltages in the 24 – 240 V AC/DC range
- Selectable outputs 1 NO + 1 NC or 1 CO
- All modules with 24 – 240 V AC/DC wide voltage in the auxiliary circuit
- Integrated electric interlocking and factory-integrated varistor (protective circuit) – easy configuration
- Plug-on function modules for connection without tools
- High setting accuracy thanks to selectable time ranges
- Reduced variance – only 1 module for sizes S00 to S3
- Add-on modules for reduced wiring and space savings



SIRIUS 3RA2811/12/16, 3RA2831/32 and 3RA2813/14/15

- As distinct from other timing relays, 3RA2811/12/16 and 3RA2831/32 function modules do not have relay outputs. They are timing relays that are directly mounted onto 3RT2 contactors. Rather than the contactors themselves, it is the function modules that are controlled, with the modules switching the contactors below them via direct contact to the contactor coil.
- With 3RA2813/14/15 time-delayed auxiliary switches, the 3RT2 contactor is controlled which then switches on or off instantaneously. The auxiliary switch mounted on the contactor responds to this via voltage tap on the contactor coil and switches the relay outputs with a time delay.

3UG451/461/463 and 3UG481/483 Monitoring Relays

for line and voltage monitoring

The 3UG4 monitoring relays provide a maximum degree of protection for machines and systems. They facilitate the early detection of line and voltage faults, allowing for their rectification before any consequential damage can occur.



IO-Link

Application

Typical applications can be derived from the table below.


Your advantages

- Thanks to the wide voltage range, the monitoring relays can be used on any power systems around the world – from 160 V to 600 V AC – without separate auxiliary voltage
- Variably adjustable to overshoot, undershoot or range monitoring
- Freely configurable delay times and RESET response
- Narrow width for all versions
- Permanent display of ACTUAL value and type of line fault with digital versions
- Automatic correction of rotation direction by differentiating between line faults and incorrect phase sequence

Measured variable	Possible system fault
Phase sequence	<ul style="list-style-type: none"> • Direction of rotation of the drive
Phase failure	<ul style="list-style-type: none"> • Fuse tripping • Control supply voltage failure • Single-phase operation of a motor with corresponding overheating
Phase asymmetry	<ul style="list-style-type: none"> • Motor overheating due to asymmetric voltages or phase failure • Detection of asymmetrically loaded supply systems • Phase failure detection despite regenerative feedback
Undervoltage	<ul style="list-style-type: none"> • Increased motor current with respective overheating • Unintended device reset • Mains failure, particularly with battery supply • Threshold value switch for analog signals from 0 to 10 V
Overvoltage	<ul style="list-style-type: none"> • System protection against destruction caused by supply overvoltages • System switch-on upon reaching a certain voltage • Threshold value switch for analog signals 0 to 10 V



Configuration of 3-phase line monitoring

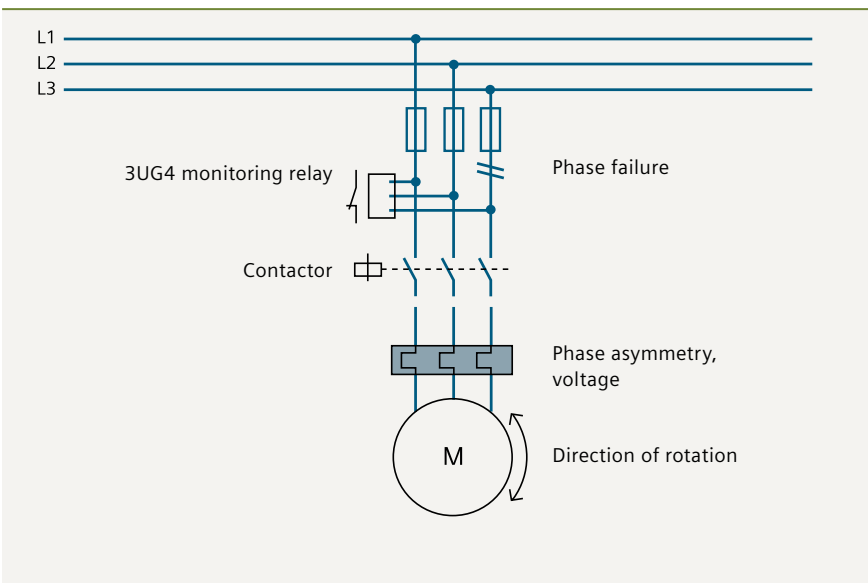

3RR21/22 and 3RR24 Monitoring Relays

for direct mounting on contactors
for multi-phase current monitoring

The 3RR2 monitoring relays are used not only for monitoring motors or other loads, but additionally also facilitate optimum current monitoring of the entire system or driven process. This for example allows for the early detection and signaling of load shedding or motor overloads. The 3RR2 monitoring relay for current monitoring is directly integrated in the load feeder. It is simply plugged onto the contactor.




Application

- Monitoring for current overshoot and undershoot
- Monitoring of open circuit
- Monitoring of no-load operation and load shedding, e.g. in the event of a torn V-belt or no-load operation of a pump
- Monitoring of overload, e.g. caused by excessive loading of conveyor belts or cranes
- Monitoring of the functionality of electric loads such as heaters
- Monitoring of wrong phase sequences on mobile equipment such as compressors or cranes
- Monitoring of high-impedance faults to ground, e.g. due to damaged insulation or moisture

Your advantages

- Direct mounting on 3RT2 contactors, i.e. no additional wiring overhead in the main circuit
- Optimally matched to the technical characteristics of 3RT2 contactors, no separate current transformers required
- 2- or 3-phase current monitoring, apparent or active current monitoring
- Display of ACTUAL values and status messages
- Easy determination of threshold values by means of direct reference to actually measured values under setpoint load
- Only one device is required for motor monitoring along the entire torque curve
- Monitoring for cable break, phase failure/sequence, fault current, motor blocking

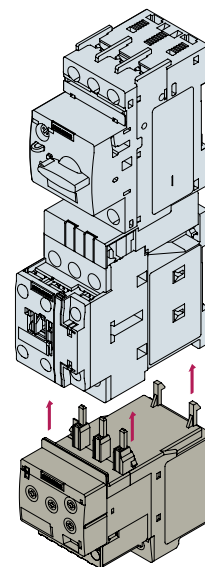

Current monitoring
directly in the main circuit

3UG4621/4622/4641 and 3UG4822/4841 Monitoring Relays

for single-phase current, power factor and active current monitoring

The 3UG4 relays for current, active power and active current monitoring are ideally suited for monitoring the load of motors and the functionality of electronic loads. These devices detect signs of wear and faults early on, thereby for example facilitating the timely implementation of maintenance measures to prevent system failures.



Application

Current monitoring

- Overload monitoring
- Underload monitoring close to the rated torque
- Monitoring of the functionality of electric loads
- Wire breakage monitoring
- Energy management (phase current monitoring)
- Threshold value switch for analog signals from 4 to 20 mA

Power factor and active current monitoring

- No-load monitoring
- Underload monitoring in the lower power range
- Overload monitoring
- Easy power factor monitoring in networks for the control of compensation systems
- Energy management
- Cable breakage between control cabinet and motor

Your advantages

- Reduced stock-keeping thanks to wide-voltage versions
- Variably adjustable to overshoot, undershoot or window monitoring
- Freely parameterizable delay times and RESET response
- Permanent display of ACTUAL value and type of fault
- Setting of monitoring limits on the basis of real measured values
- Real rms value measurement


Current monitoring

- Only two versions from 2 mA to 10 A
- Applicable for frequencies with 40–500 Hz AC and DC

Power factor and active current monitoring

- Global use thanks to wide voltage from 90 to 690 V AC
- Monitoring of smaller single-phase motors with a no-load current below 0.5 A
- One device for motor monitoring, from no-load to overload
- Voltage-independent monitoring of the motor load

Current and active power depending on the motor load

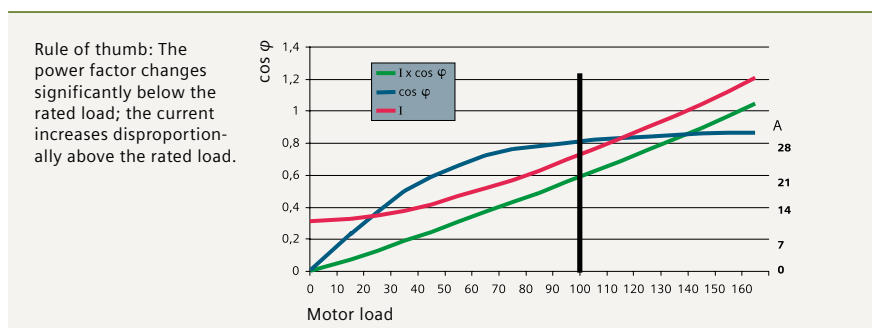

The active current I_{res} indicates a linear correlation between the motor load and the measured value over the entire measuring range.

3UG4625 and 3UG4825 Monitoring Relays

for residual current monitoring

Residual-current monitoring relays are used for monitoring residual currents that can result in insulation problems in plants due to humidity or severe contamination. By using the 3UG4625 or 3UG4825 residual-current monitoring relay in combination with a 3UL23 summation current transformer, such hazards can be eliminated. Thanks to adjustable limit or warning threshold values, the relay issues a warning before the limit value is reached and switches off reliably when the limit value is exceeded after a certain delay time. The 3UG4825 monitoring relays have an IO-Link interface for digital transfer of measured values to the control.



IO-Link

Application

Monitoring of systems prone to residual currents, e.g. caused by:

- Dust deposits or humidity
- Porous cables and lines
- Capacitive residual currents

Your advantages

- Can be used worldwide thanks to a wide voltage range from 24 to 240 V AC/DC
- Measuring range from 30 mA to 40 A
- Variably adjustable threshold values for warning and disconnection
- Freely parameterizable delay times and RESET response and connectable fault memory
- Permanent display of the ACTUAL value and fault diagnostics via display
- High level of flexibility and space saving through installation of the transformer outside the control cabinet
- All diagnostics data are now available in the control



3UG458 Monitoring Relays

for insulation monitoring

Insulation monitoring relays are used for monitoring the insulation resistance between ungrounded single- or three-phase current supplies and a protective conductor. Ungrounded, i.e. isolated networks (IT networks) are always used where high demands are placed on the reliability of the power supply, e.g. emergency lighting systems. After an initial insulation fault it is possible to continue working in safety (single-fault safety). The fault must still be rectified as quickly as possible before a second insulation fault occurs (e.g. according to DIN VDE 0100-410). For this purpose insulation monitoring relays are used which constantly measure the resistance to ground of the phase conductor and the neutral conductor, reporting a fault immediately if insulation resistance falls below the set value.



Application

Amongst others, IT networks are employed in the following applications:

- Emergency power supply systems
- Emergency lighting systems
- Industrial production plants with high availability requirements (chemical industry, automotive industry, printing industry)
- Marine and railway applications
- Mobile current generators (airplanes)
- Renewable energies, e.g. wind energy and photovoltaic plants
- Mining

Your advantages

- Devices for AC and DC systems
- All devices with wide supply voltage range
- Direct connection to networks with line voltages up to 690 V AC and 1000 V DC via voltage reducer module
- With AC networks: Frequency range 15 ... 400 Hz
- Monitoring for line breakage
- Monitoring for faulty settings
- Application safety thanks to integrated system start after start-up
- Reset and test option (via button on the front or control contact)
- Rapid response times thanks to new predictive measuring principle



3UG4501 Monitoring Relays

for level monitoring

3UG4 monitoring relays also detect non-electrical variables. Our 3UG4501 level monitoring relays thus ensure reliable 1- and 2-point controls and alarms in case of overflow or dry running – according to a simple principle: almost all liquids are conductive. This is utilized for monitoring levels. If the probes are immersed in the liquid, current flows – if the probes fall dry, no current flows.



Application

- 1- and 2-point level control
- Overflow protection
- Dry running protection
- Leakage monitoring

Your advantages

- Can be used worldwide thanks to wide voltage range from 24 to 240 V AC/DC
- Individually trimmable 2- and 3-pole wire electrodes for easy mounting from the top/bottom
- Bow electrodes for lateral installation for higher filling levels and minimum space requirements
- Flexibly adjustable to various conductive liquids through analog setting of the sensitivity from 2 to 200 k Ω
- Compensation of wave movements thanks to tripping delay times from 0.1 to 10 seconds
- Selectable feed or discharge function

1- and 2-point level monitoring, overflow protection

This method is applicable with very many liquids and substances.
Prerequisite:
Specific resistance < 200 k Ω

Product k Ω		Product k Ω	
Buttermilk	1	Natural water	5
Fruit juice	1	Wastewater	5
Vegetable juice	1	Starch solution	5
Milk	1	Oil	10
Soup	2.2	Condensed water	18
Beer	2.2	Soap foam	18
Coffee	2.2	Jams	45
Ink	2.2	Jellies	45
Saltwater	2.2	Sugar solution	90
Wine	2.2	Whisky	220
		Distilled water	450

3UG4651 and 3UG4851 Monitoring Relays

for speed monitoring

The 3UG4651 and 3UG4851 speed monitoring relays monitor the setpoint speed of motors, shafts or driven wheels for overshoot or undershoot. Implementing a period measurement, they monitor the pulses delivered per rotation from the sensors. In addition, the relays are suitable for all functions requiring the monitoring of a continuous pulse signal, e.g. belt operation and scan time monitoring or bypass control. The 3UG4851 monitoring relays have an IO-Link interface for digital transfer of measured values to the control.



IO-Link

Application


- Slip/breakage of a belt drive
- Load shedding
- Standstill monitoring (no operator protection)
- Transport item monitoring for completeness

Your advantages


- Can be used worldwide thanks to wide voltage range from 24 to 240 V AC
- Variably adjustable to overshoot, undershoot or window monitoring
- Freely parameterizable delay times and RESET response
- Permanent display of ACTUAL values or type of fault
- Use of up to 10 sensors per rotation with extremely slowly rotating motors
- Connection option for 2- or 3-conductor sensors and sensors with mechanical switching or electronic output
- Integrated auxiliary voltage for sensor

Speed monitoring example with 3UG4651

Without enable input

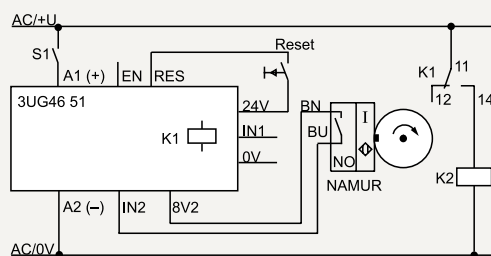

With enable input

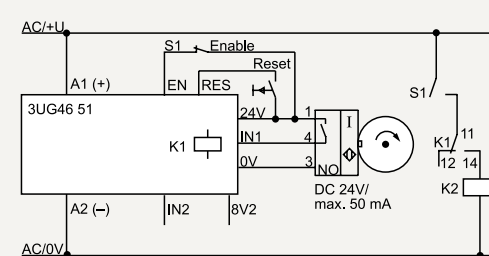

3UG546 DC Load Monitoring Relays

for load monitoring in DC applications

The 3UG546 DC load monitoring relays monitor the DC current (DC load circuit), voltage, and actual power for overshooting or undershooting of set limit values in one or two channels. Besides providing detailed fault diagnostics, the integrated energy, operating hours, and operating cycle counters can be read out and reset. The DC load monitoring relays transfer the measured and counter values as well as the diagnostic messages to the controller via Profinet. Due to the integrated relay output, reactions to limit violations can also take place independently of a controller.



Applications

- Wherever DC monitoring is required in industrial applications
- Especially in automotive production facilities, DC energy storage or autonomously guided vehicles

Your advantages

- Metering, monitoring, and transferring data with a single compact device saves time and money
- Large operational voltage range up to 800 V and current range up to 63 A
- Operating hours counter and switching cycle counter facilitate preventive maintenance
- Separate recording of energy consumption and energy recovery offers transparency in the power consumption of the machines
- Simple communication and visualization of plant energy values via Profinet



3RN2 Thermistor Motor Protection Relays

for protection against overheating

Thermistor motor protection relays provide decisive benefits in cases in which current-dependent protection using either a circuit breaker or an overload relay is not the perfect solution. In specific cases, often as a result of external effects, overheating can occur without being detected by the thermal image in the circuit breaker or overload relay. Examples for this include heavy-duty starting (e.g. centrifuges), operation with frequency converters or frequent switching, braking operations, or when cooling is restricted, e.g. due to accumulated dirt. SIRIUS 3RN2 thermistor motor protection relays reliably protect motors against overheating, as they measure the temperature at the relevant locations within the motor, directly monitoring the motor winding temperature.



Application

- Under atypical conditions such as heavy-duty starting, braking operation, frequent switching, or insufficient cooling
- In areas with gas explosion hazards such as in the oil & gas or chemical industries and for use in dusty environments such as sawmills or mills
- Worldwide use thanks to globally recognized certificates
- "Warning and shutdown" function using two sensor circuits with different response temperatures – this means that it is possible to respond before overheating occurs


Your advantages

- Optimal protection thanks to direct measurement of the motor temperature
- With ATEX approval, even for hazardous areas – meets SIL1 according to EN 50495
- Space-saving, uniform enclosure concept in titanium gray – 17.5 or 22.5 mm width available
- Simple handling thanks to removable terminals
- Low-cost version for bimetallic sensors






Characteristics for type A thermistor sensor

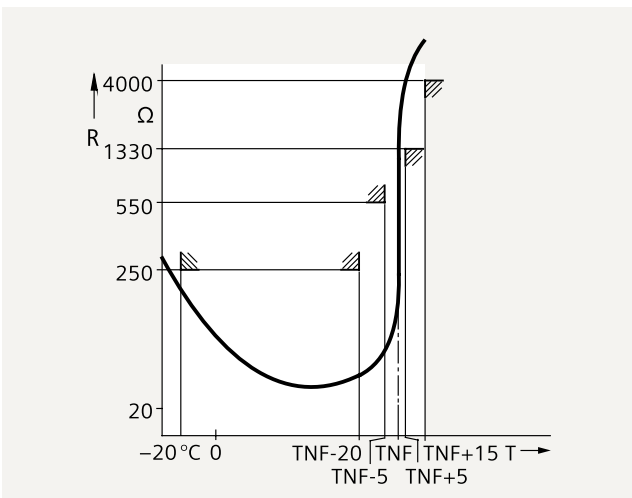

Thermistors (PTCs) in the three-phase motor

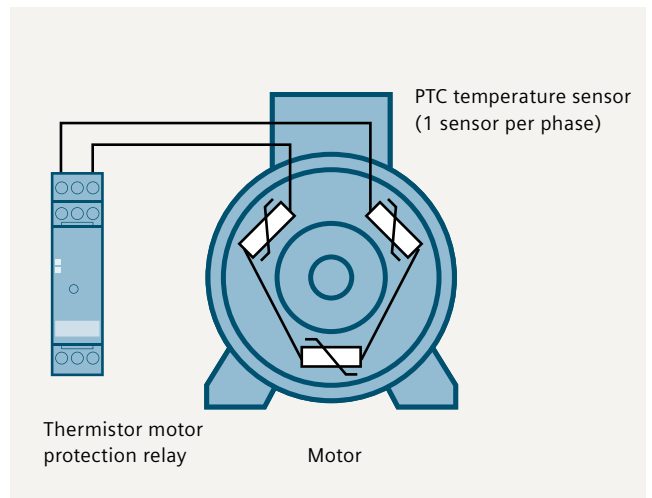

SIRIUS 3RS25 Temperature Monitoring Relays

analog-adjustable

SIRIUS 3RS25 temperature monitoring relays can be used to measure temperatures in solid, liquid, and gas media. The temperature is recorded by a sensor in the medium, evaluated by the device, and monitored to determine whether it is within the upper and lower temperature limits. The analog multifunctional device is parameterized using rotary and slide switches. The new 3RS25 temperature monitoring relays replace the predecessor 3RS1.



Applications

- Motor and system protection
- Control cabinet temperature monitoring
- Frost monitoring
- Temperature limits for process variables e.g. in the packaging industry or electroplating
- Controlling equipment and machines such as heating, air-conditioning and ventilation systems, solar collectors, heat pumps or warm water supplies
- Motor, bearing and gear oil monitoring
- Coolant monitoring
- Overload protection in transformer windings
- Simple two-point temperature controllers

Your advantages

- Versions for a sensor, a threshold value, and for Pt100 sensor types as well as thermo elements J and K for the most common temperature ranges
- Permanent wiring due to removable terminals in screw and spring-type technology (push-in)
- Compact, easy to adjust two-point controller (overshoot and undershoot)
- Relay changeover outputs for direct switching of loads and simultaneous use of the NC contact as the signaling contact
- Easy operation using rotary potentiometer and settable hysteresis (5%, 10%, 15%, 20%)



SIRIUS 3RS26/28/29 Temperature Monitoring Relays

digital-adjustable

SIRIUS 3RS2 temperature monitoring relays with a width of 22.5 mm are used to measure temperatures in solid, liquid and gas media. They monitor temperatures to evaluate whether they are above or below a certain value or within a specific operating range (range monitoring function). The function of the basic device can be extended without wiring via a SIL1-certified infrared interface with a sensor extension module. This combination features three resistance sensors. Therefore the temperature in each winding of three-phase motors or transformers can be optimally monitored. The new SIRIUS 3RS2 temperature monitoring relays fully supersede the functionality of the predecessor 3RS1 in a single device type.



Applications

- Can be used in almost any application where a temperature range must not be overshoot or undershot
- Simple and compact two-point or three-point temperature controllers

Your advantages

- Intuitive operating concept and LCD display with additional functionalities (e.g. teaching, output of warning values with color change)
- Variants for a sensor with two threshold values for all common resistance sensors and thermoelements
- Due to an integrated infrared interface (SIL 1), the digital basic unit can be expanded for up to three sensors and an analog input (4...20 mA)
- ATEX explosion protection via analog input in the sensor expansion module (no intrinsically safe outputs, suitable explosion-protection type sensors required)
- Safety certification according to IEC 61508/62061 or ISO 13849 up to SIL 1 / PL c, EN 14597 for heat generating systems and EN 50156 for burners

3RQ1 Coupling Relays

Force-guided coupling relays up to SIL 3 / PL e

The force-guided SIRIUS 3RQ1 coupling relays come manufactured in an innovative titanium grey industrial enclosure and are available in widths of 17.5 or 22.5 mm.

Because the relays are force-guided in accordance with IEC 60947-5-1 (IEC 61810-3), the mechanical connection between the contacts ensures the NO and NC contacts are never closed simultaneously. This means failures to open can be reliably recognized in order to ensure maximum safety. This makes them suitable for use in rail, signal systems, and elevators, for example.

These coupling relays are also an integral component of the 3SK safety relay system, and serve as an output expansion up to SIL 3.



Application


Reliable coupling of signals with force-guided contacts, including safety applications up to SIL 3 / PL e:

- Galvanic isolation
- Voltage conversion, e.g. from 24 V DC to 230 V AC
- Signal amplification
- General relay controls
- Controller overvoltage and EMC protection


Your advantages

- Wide voltage ranges from 24 to 240 V AC/DC with a mounting depth of 90 mm available for all variants
- Permanent wiring due to removable terminals in screw and spring-type technology (push-in)
- Force-guided contacts used to read back relay status values and provide reliable diagnostics or signaling
- Usable as an output expansion for SIRIUS 3SK safety relays via a device connector
- All variants with genuine load contacts, including in NC circuit
- Safety certification based on functional safety up to SIL 3 / PL e (IEC 61508 / ISO 13849)
- International standards and certifications incl. CE, UL/CSA, EAC, CCC, shipbuilding and rail applications


Application based on forced guidance

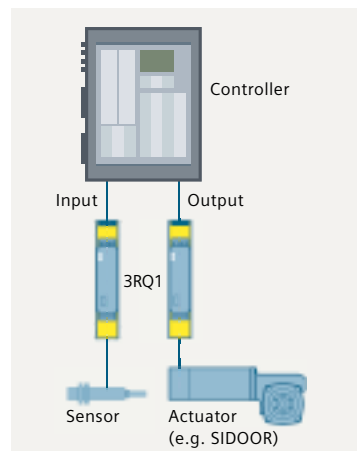

3RQ1 as coupling link for signals, e.g. for fail-safe control

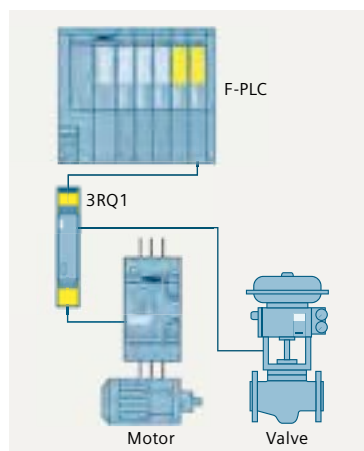

3RQ1 as output expansion (SIL 1–3) for 3SK with direct control of actuators and signal elements

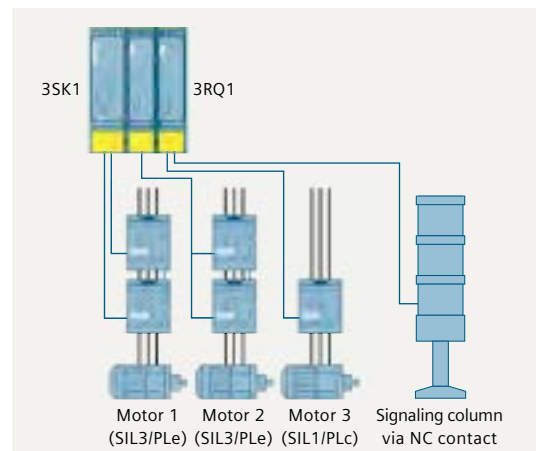

3RQ2 Coupling Relays

in innovative industrial enclosure

The 3RQ2 coupling relays are able to deliver convincing results thanks to their wide voltage range and universal usability. Coming in a high-quality industrial enclosure with a modern titanium grey design, they optically match up with the relay family and offer user-friendly connection systems with removable terminals. Just like their predecessor series, SIRIUS 3RS18, the relays come with a wide voltage range from 24 V to 240 V AC/DC and are an absolute highlight in the coupler market. The devices can optionally be ordered with one, two or three changeover contacts. All versions are available with screw or spring-type terminals with push-in technology. Contact reliability is particularly high thanks to the hard gold-plated contacts – even at low currents.



Application

- Wherever electronically optimized contacts are required and devices with wide voltage are used
- Predestined for inputs and outputs on PLC thanks to hard gold-plated contacts

Your advantages

- Uniform enclosure design
- Permanent wiring thanks to removable terminals in screw or spring-type connection system (push-in)
- Replacing individual terminals reduces wiring effort
- One product for all control voltages from 24 V to 240 V AC/DC
- Cost savings thanks to reduced variance
- Particularly high contact reliability even with low currents
- International standards and certifications incl. CE, UL/CSA, EAC and confirmations for railway



3RQ3 Coupling Relays

in 6.2 mm slimline, compact design with relay output

3RQ3 coupling relays have been innovated and are now available in a high-quality enclosure design with a uniform look across the range. With a width of just 6.2 mm and a low mounting depth and height, they are ideal for optimizing the use of space in control cabinets with narrow tier spacing or in flat switchboxes. All versions are available with either screw terminals or spring-type terminals with push-in technology. The wire inlet and front clamping option additionally serves to reduce wiring times.



Application

- Galvanic isolation
- Voltage conversion, e.g. from 24 V DC to 230 V AC
- Signal amplification
- General relay controls
- Controller overvoltage and EMC protection

Your advantages with 3RQ3

General


- Option of either screw terminals or spring-type terminals with push-in technology – ensures rapid and reliable wiring
- Cable inlet and terminals accessible from the front – accelerates the wiring process and avoids errors
- Width of 6.2 mm across the entire range – reducing space requirements in the control cabinet
- Lower device variance – reduced inventory costs
- Green LED – displays functional state of the relay coupler
- Uniform accessories for all devices
 - Universal bridging option with connecting combs for all terminals
 - Galvanic isolation plate for isolating different voltages for neighboring units
 - “Clip-on” labels that can be individually printed
- Optional connecting comb for rapidly bridging equal potentials without the need for wiring

Relays fixed in enclosure

- Increased contact reliability

With plug-in relays

- Quicker replacement of worn relays with existing wiring
- Shorter installation times thanks to certified complete units
- Device versions optionally with hard gold-plated contacts
- Single relays available as components

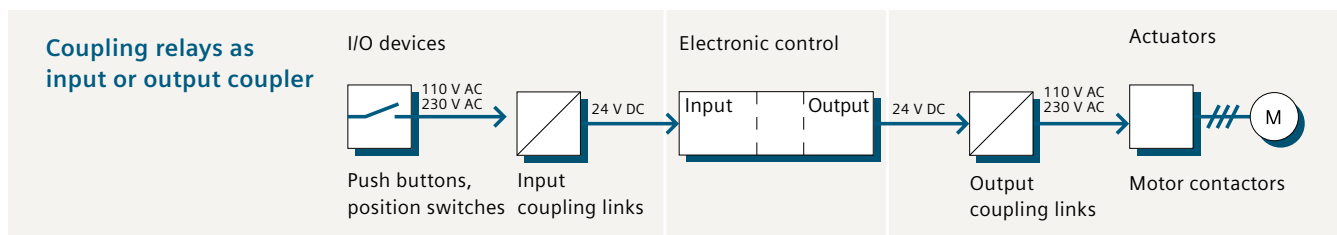

3RQ3 Coupling Relays

in 6.2 mm slimline, compact design with semiconductor output

The latest coupling relays are available either with conventional relays or as a semiconductor version. Semiconductor coupling relays offer some significant advantages over electromechanical units – electronic components are extremely reliable and have a very long service life (see below). This means that the input coupler is the better option overall in terms of both technology and price. When considering output couplers, the question of whether to use a relay or semiconductor should be answered by taking into account the requirements concerning switching capacity and the number of operating cycles. If a relay has to be replaced just once during the entire service life of a machine, then a semiconductor coupler will already have paid for itself. All versions are available with either screw-type terminals or spring-type terminals with push-in technology.



Application

- Electrical isolation, voltage conversion
- Switching of DC loads
- Switching of capacitive loads
- Controller overvoltage and EMC protection

Your advantages – 3RQ3 with semiconductor output

- Extremely long electrical service life/unlimited number of switching cycles
- Extremely high contact reliability
- High DC switching capacity
- Short switching times
- Optional connecting comb for rapidly bridging equal potentials without the need for wiring
- Noise-free switching

Service life comparison

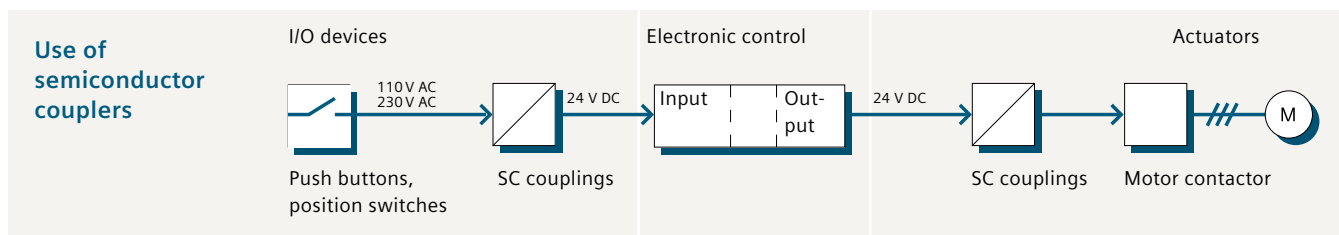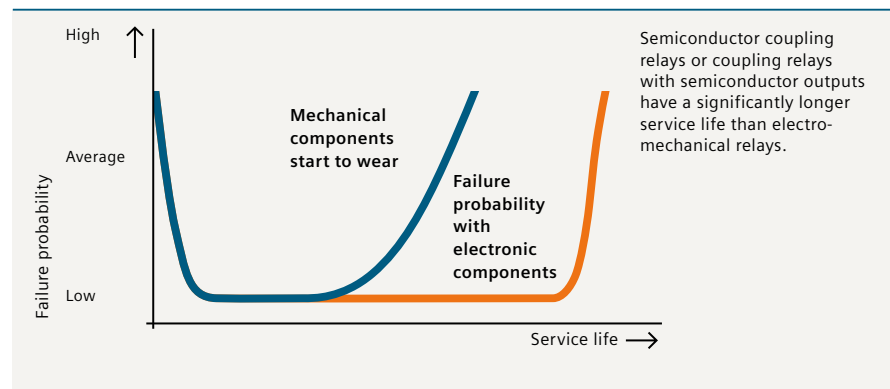

LZS Coupling Relays

with plug-in relays

Plug-in relay couplers are available both as complete devices and as individual modules for self-assembly or spare parts requirements. The range is divided into three types: RT, PT and MT.



Application

- As coupling relay for galvanic isolation between field and input and outputs of electronic controls
- Contact multiplication
- Switching of small loads
- As potential transfer switch

Your advantages

- Wiring without tools and vibration-proof connection thanks to innovative push-in spring-type terminals
- Base with logical isolation for easy wiring
- Tested AC-15 and DC-13 switching capacity
- Available coil voltages: 24 V DC, 24 V AC, 115 V AC, 230 V AC
- Hard gold-plated contacts for optimum interaction with electronic controls

Configuration information

The test lever of the PT relay does not feature a latching mechanism. If the test lever is pressed further until a movement of 90° is reached, two small snap-in lugs break off and the test lever can be set to latching. When using plug-in relays with voltages of 60 Hz AC, the lower response value has to be increased by 10%, the power loss decreases slightly.

Types



LZS:RT

1 or 2 CO contacts
AC-1: 16/8 A
Width: 15.5 mm

LZS:PT

2, 3 or 4 CO contacts
AC-1: 12/10/6 A
Width: 28 mm

LZS:MT

3 CO contacts
AC-1: 10 A
Width: 38 mm

Wiring bracket for push-in spring-type terminal base



Wiring bracket for push-in screw terminal base



3RS70 Signal Converters

Standard signal and universal converters – in slimline, compact design

Signal converters are mainly used to electrically isolate and convert analog signals. Sensors/actuators and controls generally have different power supply units, and must therefore be electrically isolated from one another. This is either integrated in the control or is implemented using a signal converter. A signal has to be converted into another signal if, for instance, a voltage signal needs to be converted for transmission over a long distance into a current signal, or if the output of a sensor and the input of a control are incompatible with one another. Another application is offered by the implemented frequency outputs, which convert the input signal into a proportional frequency. This means that analog signals can be processed with digital inputs. This is important if the control does not have any provisions for an analog input, or if all of its analog inputs are already assigned, e.g. when devices are retrofitted.



Application

- Galvanic isolation of analog signals
- Conversion of analog signals
- Conversion of analog signals into a frequency
- Conversion of non-standard signals to standard signals
- Overvoltage and short-circuit protection for analog PLC inputs

Your advantages


- High-quality, modern titanium gray design
- Look is consistent with all other Siemens devices in the control cabinet
- Simplified logistics and inventory management thanks to reduced device variance resulting from exclusive use of 3-way isolation
- Little space required on the mounting rail:
 - Slimline, compact design with width of 6.2 mm
 - and low installation depth/height
 - For flat control boxes and control cabinets with tight tier spacing

Passive converters

Passive converters do not require a supply voltage as the energy they require is supplied via the analog signal.

3-way separation

In 3-way separation, each circuit is isolated from the other circuits, i.e. the input, output, and supply voltage potentials are not linked, meaning that they cannot affect each other.

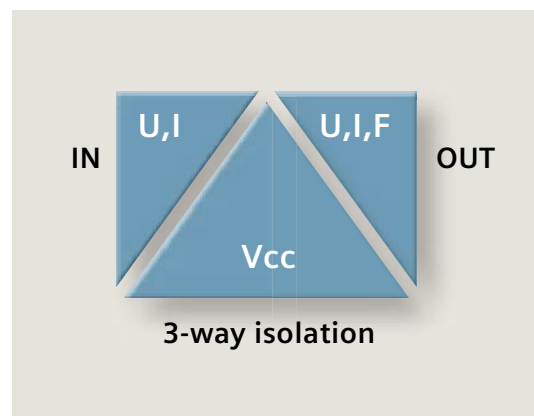

3TG10 Power Relays / Miniature Contactors

for high performance with minimum dimensions

The 3TG10 power relays/miniature contactors are the ideal solution for all applications requiring small, low-noise relays or contactors at low costs. The power relays are suitable for basic controls and particularly for use in large-scale series devices and controls. They are ideal for applications which require only one auxiliary contact and no overload relay – and place increased requirements upon switching capacity, switching voltage and service life.



Application

- Domestic appliances and installations
- Hoisting systems: Small elevators, elevating platforms
- Building technology, hum-free application in building systems, e.g. in hospitals

Configuration information

With a 20 A load on the three main current paths, the following applies with $I > 10$ A for the fourth current path: Permissible ambient temperature 40 °C

Your advantages

- Any mounting position, hum-free
- Safe isolation
- Screw-type or plug-in connection
- Integrated auxiliary switch
- AC-3 power: 4 kW / 400 V
- Operating current I_e / AC-1: 20 A / 400 V
- Inrush current per phase: 90 A
- Integrated overvoltage damping
- Narrow width of only 36 mm



Scan the
QR code
for further
information



**Published by
Siemens AG**

Smart Infrastructure
Electrical Products
Werner-von-Siemens-Str. 48–50
92224 Amberg
Germany

**For the U.S. published by
Siemens Industry Inc.**

100 Technology Drive
Alpharetta, GA 30005
United States

For more information,
please contact our
Customer Support Center:
Phone: +49 180 524 70 00
Fax: +49 180 524 24 71
(Charges depending on provider)
E-mail: support.energy@siemens.com

Article No. SIEP-B10003-01-7600
WS 04211.0
© Siemens 2021

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Siemens AG or other companies whose use by third parties for their own purposes could violate the rights of the owners.

SIEMENS

Ingenuity for life



Technical information

Monitoring, Controlling and Switching with SIRIUS Relays

One range for every application

**SIRIUS
Monitor**

[siemens.com/relays](https://www.siemens.com/relays)

SIRIUS Timing Relays

Overview of SIRIUS timing relays	3RP25 industrial design	3RP20 contactor design	7PV15 Insta design	3RA28 SIRIUS 3RT2 contactor mounting	3RT1916/26 SIRIUS 3RT1 contactor mounting
Function	Number and type of contacts				
ON-delay	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO, 2 CO ¹⁾	1 CO, 2 CO	1 CO, 1 NO/1 NC, 1 NO (SC)	1 NO/1 NC, 1 NO (SC)
OFF-delay with control signal	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO, 2 CO ¹⁾	1 CO, 2 CO	1 CO, 1 NO/1 NC, 1 NO (SC)	1 NO/1 NC, 1 NO (SC)
OFF-delay without control signal	1 CO, 2 CO	–	1 CO	1 CO, 1 NO/1 NC	2 NO, 1 NC
Additive ON-delay with control signal	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO	1 CO	–	–
Additive ON-delay, instantaneous OFF with control signal	2 CO ¹⁾ , 1 NO (SC)	1 CO	–	–	–
ON/OFF delay with control signal	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO, 2 CO ¹⁾	2 CO	–	–
Wye(star)-delta function with run-on time	3 NO	–	–	–	–
Wye(star)-delta function	2 NO, 2 CO	2 CO	2 NO	2 NO	2 NO
Flashing, non-symmetrical, starting with break (clock generator)	1 CO, 1 NO (SC)	–	1 CO	–	–
Flashing, symmetrical, starting with break	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO, 2 CO ¹⁾	1 CO, 2 CO	–	–
Flashing, symmetrical, starting with pulse	2 CO ¹⁾ , 1 NO (SC)	–	–	–	–
Passing make contact	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO, 2 CO ¹⁾	1 CO, 2 CO	–	–
Passing break contact with control signal (retrotriggerable interval relay with deactivated control signal)	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO, 2 CO ¹⁾	1 CO	–	–
Pulse-shaping with control signal (passing make contact with control signal, not retrotriggerable)	1 CO, 2 CO ¹⁾ , 1 NO (SC)	1 CO, 2 CO ¹⁾	1 CO, 2 CO	–	–
Fixed pulse after ON-delay	–	–	2 CO	–	–
Pulse-delay relay (settable pulse and pulse delay, pulse length 500 ms)	2 CO ¹⁾ , 1 NO (SC)	–	–	–	–
Pulse-delay relay with control signal (settable pulse and pulse delay, pulse length 500 ms)	2 CO ¹⁾ , 1 NO (SC)	–	–	–	–
Retrotriggerable interval relay with activated control signal (watchdog)	2 CO ¹⁾ , 1 NO (SC)	–	–	–	–
Non-volatile time relay, positive passing make contact	1 CO, 2 CO	–	–	–	–

¹⁾ Can be used both as two CO contacts switched in parallel and as one CO contact switching instantaneously + one CO contact switching with time delay.

For further information refer to Catalog IC 10 and the SIRIUS 3RP25 timing relay simulator: www.siemens.com/relays

CO = changeover contact
 NO = normally open contact
 SC = semiconductor
 NC = normally closed contact

SIRIUS 3RP20 / 3RP25 Timing Relays and 7PV15 Timing Relays

3RP25 electronic timing relays in 17.5 mm and 22.5 mm industrial enclosure

Function	Contacts	Width	Time range	Rated control supply voltage U_s	Article No.
13 functions	1 CO	17.5 mm	0.05 s – 100 h	24 V AC/DC	3RP2505-□AB30
	1 CO	17.5 mm	0.05 s – 100 h	12 – 240 V AC/DC	3RP2505-□AW30
	1 NO (SC)	17.5 mm	0.05 s – 100 h	12 – 240 V AC/DC	3RP2505-□CW30
	2 CO ¹⁾	22.5 mm	0.05 s – 100 h	24 – 240 V AC/DC	3RP2505-□RW30
27 functions	2 CO	22.5 mm	0.05 s – 100 h	24 V AC/DC	3RP2505-□BB30
	2 CO	22.5 mm	0.05 s – 100 h	400 – 440 V AC	3RP2505-□BT20
	2 CO	22.5 mm	0.05 s – 100 h	12 – 240 V AC/DC	3RP2505-□BW30
ON-delay	1 CO	17.5 mm	0.5 s – 10 s	12 – 240 V AC/DC	3RP2511-□AW30
	1 CO	17.5 mm	1 s – 30 s	12 – 240 V AC/DC	3RP2512-□AW30
	1 CO	17.5 mm	5 s – 100 s	12 – 240 V AC/DC	3RP2513-□AW30
	1 CO	17.5 mm	0.05 s – 100 h	12 – 240 V AC/DC	3RP2525-□AW30
	2 CO	22.5 mm	0.05 s – 100 h	24 V AC/DC	3RP2525-□BB30
	2 CO	22.5 mm	0.05 s – 100 h	12 – 240 V AC/DC	3RP2525-□BW30
	1 NO (SC)	17.5 mm	0.05 s – 240 s	12 – 240 V AC/DC	3RP2527-□EW30
	OFF-delay with control signal	1 CO	17.5 mm	0.05 s – 100 h	12 – 240 V AC/DC
OFF-delay without control signal, non-volatile, passing make contact	1 CO	17.5 mm	0.05 s – 600 s	24 V AC/DC	3RP2540-□AB30
	1 CO	22.5 mm	0.05 s – 600 s	12 – 240 V AC/DC	3RP2540-□AW30
	2 CO	22.5 mm	0.05 s – 600 s	24 V AC/DC	3RP2540-□BB30
	2 CO	22.5 mm	0.05 s – 600 s	12 – 240 V AC/DC	3RP2540-□BW30
Clock generator	1 CO	17.5 mm	0.05 s – 100 h	12 – 240 V AC/DC	3RP2555-□AW30
Wye(star)-delta function (SD) with run-on time	3 NO	22.5 mm	1 s – 20 s (SD), 30 s – 600 s run-on time	12 – 240 V AC/DC	3RP2560-□SW30
Wye(star)-delta function	2 NO	22.5 mm	1 s – 20 s (SD)	200 – 240 V / 380 – 440 V AC	3RP2574-□NM20
	2 NO	22.5 mm	1 s – 20 s (SD)	12 – 240 V AC/DC	3RP2574-□NW30
	2 NO	22.5 mm	3 s – 60 s (SD)	200 – 240 V / 380 – 440 V AC	3RP2576-□NM20
	2 NO	22.5 mm	3 s – 60 s (SD)	12 – 240 V AC/DC	3RP2576-□NW30

¹⁾ force-guided contacts, "railway-compatible"

Screw terminals 1
Spring-type terminals 2

3RP20 electronic timing relays in SIRIUS design 45 mm

Function	Contacts	Time range	Rated control supply voltage U_s	Article No.
8 functions	1 CO	0.05 s – 100 h	24 V AC/DC/100 – 127 V AC	3RP2005-□AQ30
	1 CO	0.05 s – 100 h	24 V AC/DC/200 – 240 V AC	3RP2005-□AP30
16 functions ¹⁾	2 CO	0.05 s – 100 h	24 – 240 V AC/DC	3RP2005-□BW30
ON-delay	1 CO	0.05 s – 100 h	24 V AC/DC/100 – 127 V AC	3RP2025-□AQ30
	1 CO	0.05 s – 100 h	24 V AC/DC/200 – 240 V AC	3RP2025-□AP30

¹⁾ The 16 functions correspond to the 8 functions of the multifunctional timing relays with one CO contact. In addition it can be set whether both CO outputs should respond with a delay or whether the second CO should switch immediately.

Screw terminals 1
Spring-type terminals 2

7PV15 electronic timing relays in 17.5 mm enclosure for industry and infrastructure

Function	Contacts	Time range	Rated control supply voltage U_s	Article No.
7 functions	1 CO	0.05 s – 100 h	12 – 240 V AC/DC	7PV1508-1AW30
	2 CO	0.05 s – 100 h	12 – 240 V AC/DC	7PV1508-1BW30
ON-delay	1 CO	0,05 s – 1 s	24 V AC/DC/200 – 240 V AC	7PV1511-1AP30
	1 CO	0.5 s – 10 s	24 V AC/DC/200 – 240 V AC	7PV1512-1AP30
	1 CO	0.5 s – 10 s	24 V AC/DC/100 – 127 V AC	7PV1512-1AQ30
	1 CO	5 s – 100 s	24 V AC/DC/200 – 240 V AC	7PV1513-1AP30
	1 CO	5 s – 100 s	24 V AC/DC/100 – 127 V AC	7PV1513-1AQ30
	1 CO	0.05 s – 100 h	12 – 240 V AC/DC	7PV1518-1AW30
	OFF-delay with control signal	1 CO	0.05 s – 100 h	12 – 240 V AC/DC
OFF-delay without control signal	1 CO	0.05 s – 100 s	12 – 240 V AC/DC	7PV1540-1AW30
Clock generator	1 CO	0.05 s – 100 h	12 – 240 V AC/DC	7PV1558-1AW30
Wye(star)-delta function	1 NO + 1 NO	0.05 s – 100 h	12 – 240 V AC/DC	7PV1578-1BW30

SIRIUS 3RA2811/12/16, 3RA2831/32 Function Modules

3RA2811/12 function modules for direct-on-line starting for mounting on 3RT2 contactors with semiconductor output for sizes S00 and S0


Function	Time range	Rated control supply voltage U_s	Article No.
ON-delay	0.05 s – 100 s	24 – 240 V AC/DC	3RA2811-□CW10
OFF-delay with control signal	0.05 s – 100 s	24 – 240 V AC/DC	3RA2812-□DW10

Screw terminals ①
Spring-type terminals ②

3RA2831/32 function modules for direct-on-line starting for mounting on contactors with semiconductor output for sizes S2 and S3

ON-delay	0.05 s – 100 s	24 – 90 V AC/DC	3RA2831-□DG10
	0.05 s – 100 s	90 – 240 V AC/DC	3RA2831-□DH10
OFF-delay with control signal	0.05 s – 100 s	24 – 90 V AC/DC	3RA2832-□DG10
	0.05 s – 100 s	90 – 240 V AC/DC	3RA2832-□DH10

Screw terminals ①
Spring-type terminals ②

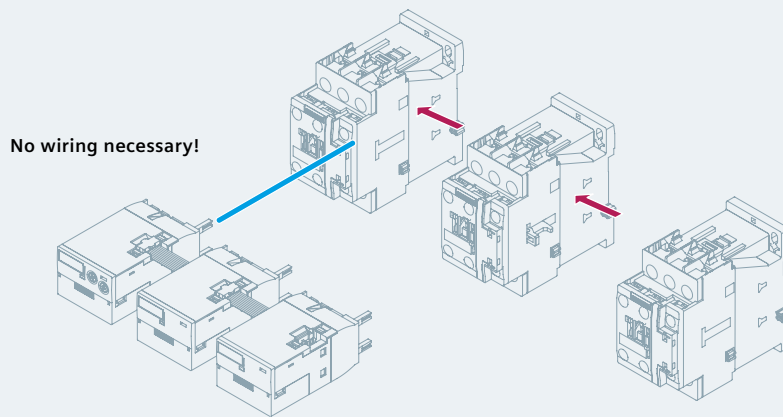

3RA2816 function modules for star-delta (wye-delta) starting

Star-delta (wye-delta) function	0.5 s – 60 s	24 – 240 V AC/DC	3RA2816-0EW20
---------------------------------	--------------	------------------	---------------

3RT1926-2 plug-on timing relays for star-delta (wye-delta) starting



Function	Time range	Rated control supply voltage U_s	Contacts	Article No.
Star-delta (wye-delta) function	0.5 s – 30 s	24 V AC/DC	1 NO delayed + 1 NO instantaneous	3RT1926-2GJ51
		100 – 127 V AC/DC	1 NO delayed + 1 NO instantaneous	3RT1926-2GC51
		200 – 240 V AC/DC	1 NO delayed + 1 NO instantaneous	3RT1926-2GD51

Sizes S6 – S12

SIRIUS 3RA2813/14/15 Time-Delayed Auxiliary Switches

3RA2813/14/15 electronically delayed auxiliary switches for mounting on 3RT2 contactors for sizes S00 to S3, integrated varistor

Function	Rated control supply voltage U_s	Time range	Contacts	Article No.
ON-delay	24 – 240 V AC/DC	0.05 s – 100 s	1 CO	3RA2813-□AW10
ON-delay	24 – 240 V AC/DC	0.05 s – 100 s	1NO + 1NC	3RA2813-□FW10
OFF-delay with control signal	24 – 240 V AC/DC	0.05 s – 100 s	1 CO	3RA2814-□AW10
OFF-delay with control signal	24 – 240 V AC/DC	0.05 s – 100 s	1NO + 1NC	3RA2814-□FW10
OFF-delay without control signal	24 – 240 V AC/DC	0.05 s – 100 s	1 CO	3RA2815-□AW10
OFF-delay without control signal	24 – 240 V AC/DC	0.05 s – 100 s	1NO + 1NC	3RA2815-□FW10

Screw terminals 
Spring-type terminals 

3RT1926-2 electronically delayed auxiliary switches for mounting on 3RT1 contactors with integrated varistor

ON-delay	24 V AC/DC	0.05 s – 1 s	1NO + 1NC	3RT1926-2EJ11
		0.5 s – 10 s	1NO + 1NC	3RT1926-2EJ21
		5 s – 100 s	1NO + 1NC	3RT1926-2EJ31
ON-delay	AC 100 – 127 V	0.05 s – 1 s	1NO + 1NC	3RT1926-2EC11
		0.5 s – 10 s	1NO + 1NC	3RT1926-2EC21
		5 s – 100 s	1NO + 1NC	3RT1926-2EC31
ON-delay	AC 200 – 240 V	0.05 s – 1 s	1NO + 1NC	3RT1926-2ED11
		0.5 s – 10 s	1NO + 1NC	3RT1926-2ED21
		5 s – 100 s	1NO + 1NC	3RT1926-2ED31
OFF-delay without control signal	24 V AC/DC	0.05 s – 1 s	1NO + 1NC	3RT1926-2FJ11
		0.5 s – 10 s	1NO + 1NC	3RT1926-2FJ21
		5 s – 100 s	1NO + 1NC	3RT1926-2FJ31
OFF-delay without control signal	AC 100 – 127 V	0.05 s – 1 s	1NO + 1NC	3RT1926-2FK11
		0.5 s – 10 s	1NO + 1NC	3RT1926-2FK21
		5 s – 100 s	1NO + 1NC	3RT1926-2FK31
OFF-delay without control signal	AC 200 – 240 V	0.05 s – 1 s	1NO + 1NC	3RT1926-2FL11
		0.5 s – 10 s	1NO + 1NC	3RT1926-2FL21
		5 s – 100 s	1NO + 1NC	3RT1926-2FL31

Sizes S6 – S12

SIRIUS 3UG4 Monitoring Relays

3UG451, 3UG461 monitoring relays for line monitoring

Phase sequence	Phase failure	Asymmetry	Hysteresis	Under-voltage	Over-voltage	N-cond. monitoring	Delay times	Contacts	Rated control supply voltage $U_s^{1)}$	Article No.
22.5 mm width, 3UG4614 to 3UG4618 digital-adjustable, with fault memory and LC display										
Yes	Condit. ²⁾	–	–	–	–	–	–	1 CO	160–260 V ¹⁾ AC 320–500 V ¹⁾ AC 420–690 V ¹⁾ AC	3UG4511-□AN20 3UG4511-□AP20 3UG4511-□AQ20
								2 CO	160–260 V ¹⁾ AC 320–500 V ¹⁾ AC 420–690 V ¹⁾ AC	3UG4511-□BN20 3UG4511-□BP20 3UG4511-□BQ20
Yes	Yes	10%	–	–	–	–	–	1 CO 2 CO	160–690 V ¹⁾ AC 160–690 V ¹⁾ AC	3UG4512-□AR20 3UG4512-□BR20
Yes	Yes	20%	5%	80% of U_s	–	–	OFF-delay 0.1 s – 20 s	2 CO	160–690 V ¹⁾ AC	3UG4513-□BR20
Selectable	Yes	0 or 5–20%	1–20 V	160–690 V	–	–	ON- and OFF-delay 0.1 s – 20 s	2 CO	160–690 V ¹⁾ AC	3UG4614-□BR20
Selectable	Yes	Via threshold values	1–20 V	160–690 V	160–690 V	–	0.1 s – 20 s each for U_{min} and U_{max}	1 CO each for U_{min} and U_{max}	160–690 V ¹⁾ AC	3UG4615-□CR20
Selectable	Yes	Via threshold values	1–20 V	90–400 V against N	90–400 V against N	Yes	0.1 s – 20 s each for U_{min} and U_{max}	1 CO each for U_{min} and U_{max}	90–400 V ¹⁾ AC against N	3UG4616-□CR20
Autom. correction	Yes	0 or 5–20%	1–20 V	160–690 V	160–690 V	–	OFF-delay 0.1 s – 20 s	1 CO each for line faults and phase sequence	160–690 V ¹⁾ AC	3UG4617-□CR20
Autom. correction	Yes	0 or 5–20%	1–20 V	90–400 V against N	90–400 V against N	Yes	OFF-delay 0.1 s – 20 s	1 CO each for line faults and phase sequence	90–400 V ¹⁾ AC against N	3UG4618-□CR20

3UG463 monitoring relays for single-phase voltage monitoring

Measuring range	Hysteresis	Contacts	Delay time	Rated control supply voltage $U_s^{1)}$	Article No.
22.5 mm width, all devices digital-adjustable and with LC display, connectable fault memory, simultaneous monitoring for voltage overshoot and undershoot over the entire measuring range					
0.1–60 V AC/DC	0.1–30 V	1 CO	0.1 s – 20 s	24 V AC/DC 24–240 V AC/DC	3UG4631-□AA30 3UG4631-□AW30
10–600 V AC/DC	0.1–300 V	1 CO	0.1 s – 20 s	24 V AC/DC 24–240 V AC/DC	3UG4632-□AA30 3UG4632-□AW30
17–275 V AC/DC	0.1–150 V	1 CO	0.1 s – 20 s	Intrinsic supply	3UG4633-□AL30

3UG481 monitoring relays for line and three-phase voltage monitoring

	ON-delay time	Stabilization time	Tripping delay time	Hysteresis	Contacts	Adjustable monitoring range	Article No.
22.5 mm width, adjustable via IO-Link or locally, monitoring of phase sequence, phase failure, phase asymmetry, overvoltage and undervoltage							
IO-Link	3 phases	–	OFF	OFF	Voltage: 0–20 V Asymmetry: 0–20%	160–690 V ¹⁾ AC 90–400 V ¹⁾ AC to N	3UG4815-□AA40
	3 phases + N-cond. failure		0.1–999.9 s	0.1–999.9 s			3UG4816-□AA40
3UG483 monitoring relays for single-phase voltage monitoring							
22.5 mm width, adjustable via IO-Link or locally, monitoring of overvoltage and undervoltage							
	1 phase	OFF 0.1–999.9 s	–	OFF 0.1–999.9 s	OFF 1–300 V	10–600 V AC/DC 1 Q in SIO mode	3UG4832-□AA40

¹⁾ Absolute limit values

²⁾ Return voltage due to coupling of the individual phases

Screw terminals
Spring-type terminals

The 3UG4511 device is not able to detect phase failures reliably.

Loads connected in the three-phase network, e.g. motor windings, lamps, transformers, ensure the individual phases' connection.

Due to this network coupling, a return voltage is always present on the device terminal of the failed phase.

SIRIUS 3RR2 Monitoring Relays

3RR21 monitoring relays

Size	Measuring range	Hysteresis	Contacts	ON delay	Rated control supply voltage U_s	Article No.
All devices analog-adjustable, closed-circuit principle, 2-phase current monitoring, apparent current monitoring, tripping delay 0–30 s, automatic or manual RESET						
S00	1.6–16 A	6.25% of the threshold value	1 CO	0–60 s	24 V AC/DC	3RR2141-□AA30
					24–240 V AC/DC	3RR2141-□AW30
S0	4–40 A	6.25% of the threshold value	1 CO	0–60 s	24 V AC/DC	3RR2142-□AA30
					24–240 V AC/DC	3RR2142-□AW30
S2	8–80 A	6.25% of the threshold value	1 CO	0–60 s	24 V AC/DC	3RR2143-□AA30
					24–240 V AC/DC	3RR2143-□AW30

- Screw terminals ①
 Spring-type terminals for sizes S00, S0 ②
 Spring-type terminals for size S2 ③

3RR22 monitoring relays

Size	Measuring range	Hysteresis	Contacts	ON delay	Restart delay	Rated control supply voltage U_s	Article No.
All devices digital-adjustable, LC display, open- or closed-circuit principle, 3-phase current monitoring, active current or apparent current monitoring, delay time 0–30 s, automatic or manual RESET, phase sequence monitoring, residual current monitoring, blocking current monitoring, separate settings for warning and alarm thresholds							
S00	1.6–16 A	0.1–3 A	1 CO 1 Q	0–99 s	0–300 min	24 V AC/DC	3RR2241-□FA30
						24–240 V AC/DC	3RR2241-□FW30
S0	4–40 A	0.1–8 A	1 CO 1 Q	0–99 s	0–300 min	24 V AC/DC	3RR2242-□FA30
						24–240 V AC/DC	3RR2242-□FW30
S2	8–80 A	0.2–16 A	1 CO 1 Q	0–99 s	0–300 min	24 V AC/DC	3RR2243-□FA30
						24–240 V AC/DC	3RR2243-□FW30

- Screw terminals ①
 Spring-type terminals for sizes S00, S0 ②
 Spring-type terminals for size S2 ③

3RR24 monitoring relays


Size	Measuring range	Hysteresis	Contacts	ON delay	Restart delay	Rated control supply voltage U_s	Article No.
All devices adjustable locally and via IO-Link, LC display, open- or closed-circuit principle, 3-phase current monitoring, active current or apparent current monitoring, delay time 0–30 s, automatic or manual RESET, current asymmetry monitoring, phase sequence monitoring, residual current monitoring, blocking current monitoring, operating hours counter, switching cycle counter, separate settings for warning and alarm thresholds							
S00	1.6–16 A	0.1–3 A	1 CO	OFF	OFF	24 V DC	3RR2441-□AA40
			1 Q (in SIO mode)	0.1–999.9 s	0.1–300 min		
S0	4–40 A	0.1–8 A	1 CO	OFF	OFF	24 V DC	3RR2442-□AA40
			1 Q (in SIO mode)	0.1–999.9 s	0.1–300 min		
S2	8–80 A	0.2–16 A	1 CO	OFF	OFF	24 V DC	3RR2443-□AA40
			1 Q (in SIO mode)	0.1–999.9 s	0.1–300 min		

- Screw terminals ①
 Spring-type terminals for sizes S00, S0 ②
 Spring-type terminals for size S2 ③

Adapter for stand-alone mounting for separate mounting of the monitoring relays on DIN rails

Size	Article No.
S00	3RU2916-3A□01
S0	3RU2926-3A□01
S2	3RU2936-3AA01

- Screw terminals ④
 Spring-type terminals ⑤

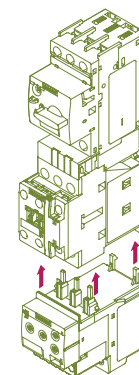

SIRIUS 3UG4 Monitoring Relays

3UG4621/22 monitoring relays for single-phase current monitoring

Measuring range	Hysteresis	Contacts	ON-delay time	Tripping delay time	Rated control supply voltage U_s	Article No.
22.5 mm width, all devices digital-adjustable and with LC display, connectable fault memory, simultaneous monitoring for current overshoot and undershoot over the entire measuring range						
3–500 mA AC/DC	0.1–250 mA	1 CO	0.1–20 s	0.1–20 s	24 V ¹⁾ AC/DC	3UG4621-□AA30
					24–240 V ²⁾ AC/DC	3UG4621-□AW30
0.05–10 A AC/DC	0.01–5 A	1 CO	0.1–20 s	0.1–20 s	24 V ¹⁾ AC/DC	3UG4622-□AA30
					24–240 V ²⁾ AC/DC	3UG4622-□AW30

¹⁾ No galvanic isolation. Load supply voltage 24 V

²⁾ Galvanic isolation between control circuit and measuring circuit. Load supply voltage for safe isolation max. 300 V, for simple separation max. 500 V.

Screw terminals 1
Spring-type terminals 2

3UG4641 monitoring relays for power factor and active current monitoring

Measuring range for power factor	Measuring range for active current I_{res}	Hysteresis with power factor	Hysteresis with active current	Contacts	ON-delay time	Tripping delay time	Rated control supply voltage U_s ¹⁾	Article No.
22.5 mm width, device digitally adjustable and with LC display, connectable fault memory, simultaneous power factor and active current monitoring over the entire measuring range								
0.1–0.99 (PF)	0.2–10.0 A	0.1 (PF)	0.1–2.0 A	1 CO+1 CO	0–99 s	0.1–20.0 s	90–690 V ¹⁾ AC	3UG4641-□CS20

¹⁾ Absolute limit values

Screw terminals 1
Spring-type terminals 2

3UG4822 monitoring relays for single-phase current monitoring

Measuring range	Hysteresis	Contacts	ON-delay time	Tripping delay time	Article No.
22.5 mm width, adjustable via IO-Link or locally, monitoring of overcurrent and undercurrent, scaling factor for considering external 1 A/5 A instrument transformer adjustable					
0.05–10 A	OFF 0.01–5 A	1 CO 1 Q in SIO mode	OFF 0.1–999.9 s	OFF 0.1–999.9 s	3UG4822-□AA40

IO-Link

3UG4841 monitoring relays for power factor and active current monitoring


22.5 mm width, adjustable via IO-Link or locally, monitoring of phase sequence, phase failure, phase asymmetry, overvoltage and undervoltage					
cos phi: 0.1–0.99 Current: 0.2–10 A	cos phi: OFF/0.1–0.20 Current: OFF/0.1–3 A	1 CO 1 Q in SIO mode	OFF 0.1–999.9 s	OFF 0.1–999.9 s	3UG4841-□CA40

Screw terminals 1
Spring-type terminals 2

Current and power factor dependent on the motor load

Rule of thumb:

The power factor changes significantly below the rated load; the current increases disproportionately above the rated load.

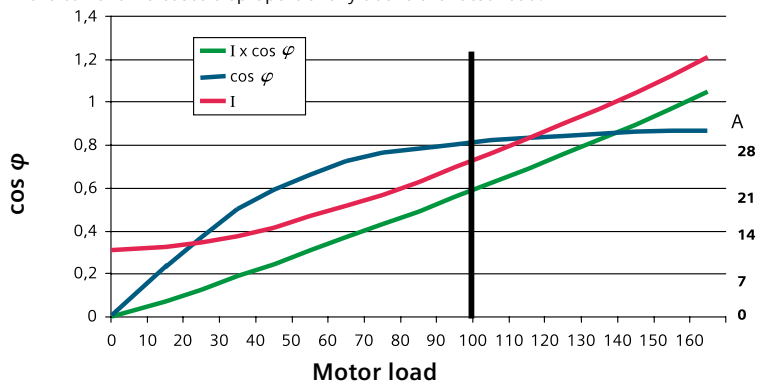

The active current I_{res} indicates a linear correlation between the motor load and the measured value over the entire measuring range.

SIRIUS 3UG4 Monitoring Relays

3UG4625 monitoring relays for residual current monitoring

Measurable current	Adjustable response value current	Switching hysteresis	Adjustable response delay time	Control supply voltage at 50 Hz at AC rated value	Control supply voltage at 60 Hz at AC rated value	Control supply voltage at DC rated value	Article No.
22.5 mm width, digitally adjustable and with LC display, permanent self-monitoring, monitoring of a warning threshold and limit value overshoot, for 3UL23 residual current transformer							
0.01–43 A	0.03–40 A	0–50%	0–20 s	24–240 V	24–240 V	24–240 V	3UG4625-□CW30

Screw terminals
Spring-type terminals

3UG4825 monitoring relays for residual current monitoring

IO-Link	Measurable current	Adjustable response value current	Switching hysteresis	Adjustable response delay time	Control supply voltage at DC rated value	Article No.
	22.5 mm width, digitally adjustable and with LC display, permanent self-monitoring, monitoring of a warning threshold and limit value overshoot, for 3UL23 residual current transformer					
	0.01–43 A	0.03–40 A	0–50%	OFF 0.1–999.9 s	24 V	3UG4825-□CA40

Screw terminals
Spring-type terminals

3UL23 residual current transformers for residual current monitoring

Diameter of bushing opening	Max. rated current per phase	Max. connectable conductor cross-section of terminal	Article No.
Detection of residual currents in machines and systems			
35 mm	85 A	2.5 mm ²	3UL2302-1A
55 mm	150 A		3UL2303-1A
80 mm	225 A		3UL2304-1A
110 mm	400 A		3UL2305-1A
140 mm	500 A		3UL2306-1A
210 mm	630 A	4 mm ²	3UL2307-1A

3UG4581 monitoring relays for insulation monitoring for non-grounded AC networks

Rated line voltage U_n	System leakage capacitance	Output relay	Meas. range U_e	Rated control supply voltage U_s	Cable break detection in the measuring range	Article No.
0–400 V AC	max. 10 μ F	1 CO	1–100 k Ω	24–240 V AC/DC	–	3UG4581-1AW30

3UG4582/83 monitoring relays for insulation monitoring for non-grounded DC and AC voltage networks

0–250 V AC, 0–300 V DC	max. 10 μ F	1 CO	1–100 k Ω	24–240 V AC/DC	Yes	3UG4582-1AW30
0–400 V AC, 0–600 V ²⁾ DC	max. 20 μ F	2 CO or 1 CO + 1 CO adjustable	1–100 k Ω , 2–200 k Ω for 2nd limit value, adjustable	24–240 V AC/DC	Yes adjustable	3UG4583-1CW30
Series module for 3UG4583 for expansion of the line voltage range to max. 690V AC and 1000V DC						3UG4983-1A

Covers for monitoring relays for insulation monitoring

Application	Version	Article No.
For 3UG4581, 3UG4582	Sealable, transparent cover	3UG4981-0C
For 3UG4583	Sealable, transparent cover	3UG4983-0C

²⁾ With 3UG4983-1A series module also suitable for insulation monitoring of IT networks up to 690V AC and 1000V DC.

SIRIUS 3UG4 / 3UG5 Monitoring Relays

3UG4501 monitoring relays for 1- and 2-point level monitoring of conductive liquids

Sensitivity	Contacts	Tripping delay time	Width	Rated control supply voltage U_s	Article No.
2–200 k Ω	1 W	0.5–10 s	22.5 mm	24 V AC/DC	3UG4501-□AA30
				24 – 240 V AC/DC	3UG4501-□AW30

Probes for level monitoring, max. operating temperature 90 °C, max. operating pressure 10 bar

Description	Cable connection	Number of poles	Article No.
Wire electrode, 500 mm long, with teflon insulation	3 x 0.5 mm ² , 2 m	3-pole	3UG3207-3A
	2 x 0.5 mm ² , 2 m	2-pole	3UG3207-2A
Wire electrode for lateral installation	3 x 0.5 mm ² , 2 m	2-pole	3UG3207-2B
	2 x 0.5 mm ² , 2 m	1-pole	3UG3207-1B
Rod electrode, stable	2 x 0.5 mm ² , 2 m	1-pole	3UG3207-1C

Screw terminals ①
Spring-type terminals ②

3UG4651 monitoring relays for monitoring undershooting and overshooting of a speed

Meas. range pulses/min	Contacts	ON-delay time	Tripping delay time	Width	Rated control supply voltage U_s	Article No.
0.1–2200 (0.0017–36.67 Hz)	1 W	1–900 s	0.1–99.9 s	22.5 mm	24 V AC/DC	3UG4651-□AA30
					24–240 V AC/DC	3UG4651-□AW30

Screw terminals ①
Spring-type terminals ②

3UG4851 monitoring relays for monitoring overshoot and undershoot of speeds

Meas. range pulses/min	Contacts	ON-delay time	Tripping delay time	Hysteresis	Article No.
Monitoring overshoot and undershoot of speeds, scaling factor for taking account of multiple pulse encoders per rotation					
0.1–2200 (0.0017–36.67 Hz)	1 W	OFF	OFF	OFF	3UG4851-□AA40
	1 Q in SIO mode	0.1–999.9 s	0.1–999.9 s	0.1–99.9 rpm	

Screw terminals ①
Spring-type terminals ②

3UG546 monitoring relays for DC load monitoring

Measurable current	Voltage measuring range	Width	Contacts	ON-delay time	Tripping delay time	Article No.
PROFINET Simultaneous monitoring of current, voltage, load; operating hours counter, switching cycle counter, energy consumption counter, energy recovery counter						
0.05–8 A (2-channel) 0.05–16 A (1-channel)	0–800 V	22.5 mm	1 W	0.1–999.9 s	0.1–999.9 s	3UG5461-1AA40
0.05–63 A	0–800 V	45.0 mm	1 W	0.1–999.9 s	0.1–999.9 s	3UG5462-1AA40
0.05–8 A (2-channel) 0.05–16 A (1-channel)	0–60 V	22.5 mm	1 W	0.1–999.9 s	0.1–999.9 s	3UG5461-1AA41
0.05–63 A	0–60 V	45.0 mm	1 W	0.1–999.9 s	0.1–999.9 s	3UG5462-1AA41

SIRIUS 3RN2 Thermistor Motor Protection Relays



Thermistor motor protection relays for PTC thermistors (Type A)
All devices except for 24 V AC/DC feature galvanic isolation

Version	RESET	Contacts	Rated control supply voltage U_c	Article No.
Compact evaluation devices, width 17.5 mm, suitable for bimetallic switches				
Terminal A1 jumpered with root of CO contact	Automatic	1 CO	24 V AC/DC	3RN2000-□AA30
			24 – 240 V AC/DC	3RN2000-□AW30
	Automatic	1NO + 1NC	24 V AC/DC	3RN2010-□CA30
			24 – 240 V AC/DC	3RN2010-□CW30
Standard evaluation devices, width 22.5 mm, suitable for bimetallic switches				
	Automatic	2 CO	24 V AC/DC	3RN2010-□BA30
			24 – 240 V AC/DC	3RN2010-□BW30
Bistable evaluation devices, width 22.5 mm, wire break and short-circuit detection in the sensor circuit				
Does not trip if control supply voltage fails	Manual/Auto/Remote	2 CO	24 – 240 V AC/DC	3RN2012-□BW31
Standard evaluation devices with ATEX approval, width 22.5 mm, wire break and short-circuit detection in the sensor circuit				
	Manual/Remote ³⁾	2 CO	24 V AC/DC	3RN2011-□BA30
			24 – 240 V AC/DC	3RN2011-□BW30
Non-volatile ²⁾	Manual/Auto/Remote	2 CO	24 V AC/DC	3RN2012-□BA30
			24 – 240 V AC/DC	3RN2012-□BW30
Safe galvanic isolation of all circuits ¹⁾ , non-volatile ²⁾	Manual/Auto/Remote	2 CO	24 V AC/DC	3RN2013-□BA30
			24 – 240 V AC/DC	3RN2013-□BW30
Safe galvanic isolation of all circuits ¹⁾ , non-volatile ²⁾	Manual/Auto/Remote	2 CO, hard gold-plated	24 – 240 V AC/DC	3RN2013-□GW30
Standard evaluation devices with ATEX approval and 2 sensor circuits for warning and shutdown, width 22.5 mm, wire break and short-circuit detection in both sensor circuits				
Safe galvanic isolation of all circuits ¹⁾ , non-volatile ²⁾	Manual/Auto/Remote	1 NO + 1 CO	24 – 240 V AC/DC	3RN2023-□DW30

¹⁾ Safe isolation up to 300 V acc. to DIN/VDE 0106, IEC 60947-1

²⁾ For information on protection against voltage failure see Catalog IC 10

³⁾ Reset using RESET button or interruption of control supply voltage possible

Screw terminals 
Spring-type terminals 

3RS2 SIRIUS Temperature Monitoring Relays

3RS2 temperature monitoring relays

Function	Sensor	Measuring ranges	Safety	IO-Link	Rated control supply voltage U_s 50/60 Hz	Article No.
Analogic adjustable, 1 sensor, 1 threshold value						
Overshoot and undershoot	Resistance sensor Pt100, Thermocouple Types J, K	-50 ... + 50 °C / 0 ... 100 °C / 0 ... 200 °C 0 ... 200 °C / 0 ... 600 °C / 500 ... 1000 °C	No	No	24 V AC/DC	3RS2500-□AA30
					24 ... 240 V AC/DC	3RS2500-□AW30
Digitally adjustable, 1 sensor, 2 threshold values						
Overshoot, undershoot and range monitoring	Resistance sensors: Pt100, Pt1000, KTY83-110, KTY84, NTC Thermocouples: Typ J, K, T, E, N, S, R, B	See table with Temperature measurement ranges for resistance sensors and thermocouples	SIL 1 / PL c acc. to IEC 61508 / ISO 13849, EN 14597, EN 50156, ATEX via analog input in 3RS29 sensor expansion module	No	24 V AC/DC	3RS2600-□BA30
					24 ... 240 V AC/DC	3RS2600-□BW30
Overshoot, undershoot and range monitoring	Resistance sensors: Pt100, Pt1000, KTY83-110, KTY84, NTC Thermocouples: Typ J, K, T, E, N, S, R, B	See table with Temperature measurement ranges for resistance sensors and thermocouples	SIL 1 / PL c acc. to IEC 61508 / ISO 13849, EN 14597, EN 50156, ATEX via analog input in 3RS29 sensor expansion module	Yes	24 V DC	3RS2800-□BA40
Sensor expansion module for 3RS26/3RS28						
2 additional sensors, analog input 4 ... 20 mA, ATEX via analog input, sensor status relay	Resistance sensors: Pt100, Pt1000, KTY83-110, KTY84, NTC	See Temperature measurement ranges for resistance sensors and thermocouples	SIL 1 / PL c acc. to IEC 61508 / ISO 13849, EN 14597, EN 50156, ATEX via analog input with 3RS26/28 basic unit	No	24 V AC/DC	3RS2900-□AA30
					24 ... 240 V AC/DC	3RS2900-□AW30

Screw terminals 1
Spring-loaded terminal (push-in) 2

Temperature measuring ranges for resistance sensors and thermocouples

Measuring ranges of resistance sensors


Sensor type	Short-circuit monitoring	Sensor wire-break monitoring	Measuring ranges in °C	Measuring ranges in °F
Pt100	Yes	Yes	-50 ... +750	-58 ... +1382
Pt1000	Yes	Yes	-50 ... +500	-58 ... +932
KTY83-110	Yes	Yes	-50 ... +175	-58 ... +347
KTY84	Yes	Yes	-40 ... +300	-40 ... +572
NTC ¹⁾	Yes	No	+80 ... +160	+176 ... +320

¹⁾ NTC type: B57227-K333-A1 (100 °C: 1.8 kΩ; 25 °C: 32.762 kΩ)


Measuring ranges of thermocouples

Sensor type	Short-circuit monitoring	Sensor wire-break monitoring	Measuring ranges in °C	Measuring ranges in °F
J	No	Yes	-99 ... +1200	-146.2 ... +2192
K	No	Yes	-99 ... +1350	-146.2 ... +2462
T	No	Yes	-99 ... +400	-146.2 ... +752
E	No	Yes	-99 ... +999	-146.2 ... +1830.2
N	No	Yes	-99 ... +1300	-146.2 ... +2372
S	No	Yes	0 ... +1750	-32 ... +3182
R	No	Yes	0 ... +1750	-32 ... +3182
B	No	Yes	-400 ... +1800	-752 ... +3272

Characteristics of most important resistance temperature sensors

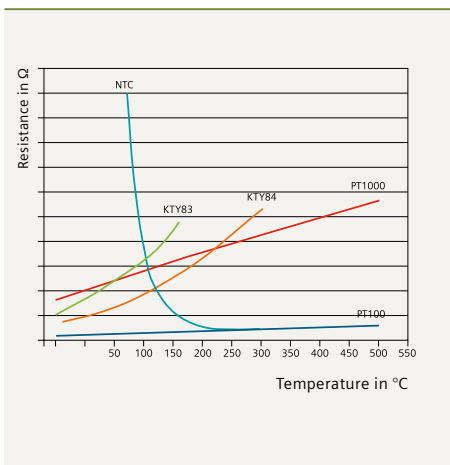

Characteristics for thermocouples

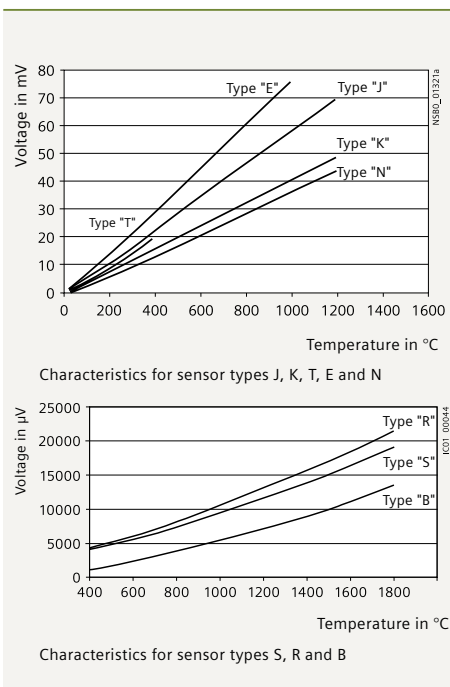

SIRIUS 3RQ1 / 3RQ2 and 3RQ3 Coupling Relays

3RQ1 coupling relays

Rated control supply voltage U_s , 50/60 Hz	Operating range Rated control supply voltage	W x H x D	Contact type	Safety level	Usable with 3SK device connector	Article No.
24–240 V AC/DC	0.7 ... 1.1	17.5 x 90 x 90mm	1 NO contact, 1 NC contact	SIL 2 / PL c	No	3RQ1000-□EW00
24–240 V AC/DC	0.7 ... 1.1	17.5 x 90 x 90mm	2 NO contacts, 1 NC contact	SIL 2 / PL c	No	3RQ1000-□GW00
24–240 V AC/DC	0.7 ... 1.1	22.5 x 90 x 90mm	2 NO contacts, 2 NC contacts	SIL 2 / PL c	No	3RQ1000-□HW00
24–240 V AC/DC	0.7 ... 1.1	22.5 x 90 x 90mm	4 NO contacts, 1 NC contact	SIL 2 / PL c	No	3RQ1000-□LW00
24–240 V AC/DC	0.7 ... 1.1	17.5 x 90 x 90mm	1 NO contact, 1 NC contact	SIL 3 / PL e	No	3RQ1200-□EW00
24 V DC	0.8 ... 1.1	17.5 x 90 x 120mm	1 NO contact, 1 NC contact	SIL 2 / PL c	Yes	3RQ1000-□EB00
24 V DC	0.8 ... 1.1	17.5 x 90 x 120mm	2 NO contacts, 1 NC contact	SIL 2 / PL c	Yes	3RQ1000-□GB00
24 V DC	0.8 ... 1.1	22.5 x 90 x 120mm	2 NO contacts, 2 NC contacts	SIL 2 / PL c	Yes	3RQ1000-□HB00
24 V DC	0.8 ... 1.1	22.5 x 90 x 120mm	4 NO contacts, 1 NC contact	SIL 2 / PL c	Yes	3RQ1000-□LB00
24 V DC	0.8 ... 1.1	17.5 x 90 x 120mm	1 NO contact, 1 NC contact	SIL 3 / PL e	Yes	3RQ1200-□EB00

Screw terminals ¹
Spring-type terminals (push-in) ²

3RQ2 coupling relays

Rated control supply voltage U_s , 50/60 Hz	Contact type	Article No.
24–240 V AC/DC	1 W	3RQ2000-□AW00
	2 W	3RQ2000-□BW00
	3 W	3RQ2000-□CW00
	3 W hard gold-plated	3RQ2000-□CW01

Screw terminals ¹
Spring-type terminals (push-in) ²

3RQ3 coupling relays with relay output, not pluggable

Output couplers with relay output

Contacts	Rated control supply voltage U_s	W x H x D	Hard gold-plating	M-0-A switch	Article No.
1 changeover contact (1 CO)	24 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3018-□AB00
	115 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3018-□AE00
	230 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3018-□AF00
	24 V DC	6.2 x 93 x 76 mm	–	No	3RQ3018-2AM08-0AA0 ¹⁾
	110 V DC	6.2 x 93 x 76 mm	–	No	3RQ3018-2AN08-0AA0 ¹⁾
	24 V AC/DC	6.2 x 93 x 76 mm	Yes	No	3RQ3018-□AB01

Input couplers with relay output

1 changeover contact (1 CO)	24 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3038-□AB00
	115 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3038-□AE00
	230 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3038-□AF00
	24 V AC/DC	6.2 x 93 x 76 mm	Yes	No	3RQ3038-□AB01
	115 V AC/DC	6.2 x 93 x 76 mm	Yes	No	3RQ3038-□AE01
	230 V AC/DC	6.2 x 93 x 76 mm	Yes	No	3RQ3038-□AF01

¹⁾ Suitable for railway applications

Screw terminals ¹
Spring-type terminals ²

3RQ3 coupling relays with relay output, pluggable

Coupling relay with plug-in relay, output coupler

Contacts	Rated control supply voltage U_s	W x H x D	Hard gold-plating	M-0-A switch	Article No.
1 changeover contact (1 CO)	24 V DC	6.2 x 93 x 76 mm	–	No	3RQ3118-□AM00
	24 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3118-□AB00
	115 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3118-□AE00
	230 V AC/DC	6.2 x 93 x 76 mm	–	No	3RQ3118-□AF00
	24 V DC	6.2 x 93 x 76 mm	Yes	No	3RQ3118-□AM01
	24 V AC/DC	6.2 x 93 x 76 mm	Yes	No	3RQ3118-□AB01
	115 V AC/DC	6.2 x 93 x 76 mm	Yes	No	3RQ3118-□AE01
	230 V AC/DC	6.2 x 93 x 76 mm	Yes	No	3RQ3118-□AF01

Screw terminals ¹
Spring-type terminals ²

SIRIUS 3RQ3 Coupling Relays

3RQ3 coupling relays with semiconductor output, not pluggable

Output couplers with semiconductor output

Rated control supply voltage U_s	W x H x D	Switching current max.	Switching voltage	Minimum load current	Short-time loading capacity	M-0-A switch	Article No.
24 V DC	6.2 x 93 x 72.5	0.5 A	60 V DC		No	–	3RQ3050-□SM50
		2 A	30 V DC		Yes	–	3RQ3052-□SM30
		5 A	30 V DC		Yes	–	3RQ3055-□SM30
		5 A	30 V DC		Yes	Yes	3RQ3065-□SM30
110 – 230 V AC/DC	6.2 x 93 x 72.5	3 A	30 V DC		Yes	–	3RQ3053-□SG30
24 V DC	6.2 x 93 x 72.5	2 A	264 V AC		No	–	3RQ3052-□SM50
		2 A	60 V DC		No	–	3RQ3052-□SM40

Input couplers with semiconductor output

24 V AC/DC	6.2 x 93 x 72.5	0.5 A	30 V DC		No	–	3RQ3070-□SB30
110 – 230 V AC/DC	6.2 x 93 x 72.5	0.5 A	30 V DC		No	–	3RQ3070-□SG30

Schraubanschluss ①
Federzugklemme ②

Replacement modules for 3RQ3118 coupling relays with plug-in relay

Rated control supply voltage U_s	Hard gold-plating	Article No.
24 V DC	AgSnO ₂	3TX7014-7BM00
	AgSnO ₂ hard gold-plated	3TX7014-7BM02
24 V AC/DC	AgSnO ₂	3TX7014-7BM00
	AgSnO ₂ hard gold-plated	3TX7014-7BM02
115 V AC/DC	AgSnO ₂	3TX7014-7BP00
230 V AC/DC	AgSnO ₂ hard gold-plated	
115 V AC/DC	AgSnO ₂	3TX7014-7BP02
230 V AC/DC	AgSnO ₂ hard gold-plated	

Accessories for 3RQ3 coupling relays

Galvanic isolation plate	3RQ3900-0A
2-pole connecting comb	3RQ3901-0A
4-pole connecting comb	3RQ3901-0B
8-pole connecting comb	3RQ3901-0C
16-pole connecting comb	3RQ3901-0D
Clip-on label, 5 x 5 mm, white	3RQ3902-0A
Clip-on label, 6 x 12 mm, white	3RQ3902-0B

SIRIUS LZS Coupling Relays

LZS coupling relay with plug-in relay – for low tier heights

Output couplers

Switching capacity of LZX plug-in relay	AC-15, 230 V	DC-13, 24 V
RT 1 W	6 A	2 A
RT 2 W	2.5 A	2 A
PT 2 W	5 A	5 A
PT 3 W	5 A	5 A
PT 4 W	DC coil: 4 A, AC coil: 2 A	4 A
MT 3 W	5 A	2 A

Logical isolation:

The connections of the contact elements and the connections of the coil are arranged on different sides, e.g. for contact elements at the top, and for the coil at the bottom. This improves the transparency of wiring. The logical isolation is not necessarily a safe isolation.

Safe isolation:

Safe isolation is a separation that prevents overspill of voltage from one circuit to another with adequate safety. (DIN VDE 106 Part 101)

Coupling relays with plug-in relays – LZS complete modules (base, plug-in relay, hold/eject clip, LED module and inscription plate)					
Versions	Rated control supply voltage U_s	Contacts	Article No.		
Complete devices, 8-, 11- and 14-pole, PT range (28 mm width)					
Complete device with plug-in base (screw terminals, standard) for snap-on mounting on 35 mm DIN rail, consisting of: plug-in relay, standard plug-in base with screw terminals, LED module (24 V DC LED module with free-wheeling diode, AC without free-wheeling diode), hold/eject clip and inscription plate	24 V DC	3 CO	LZS:PT3A5L24		
	24 V AC		LZS:PT3A5R24		
	115 V AC		LZS:PT3A5S15		
	230 V AC	4 CO	LZS:PT3A5T30		
	24 V DC		LZS:PT5A5L24		
	24 V AC		LZS:PT5A5R24		
	115 V AC		LZS:PT5A5S15		
230 V AC	LZS:PT5A5T30				
Complete device with plug-in base (screw terminals, logical isolation) for snap-on mounting on 35 mm DIN rail, consisting of: plug-in relay, plug-in base with screw terminals and logical isolation, LED module (24 V DC LED module with free-wheeling diode, AC without free-wheeling diode), hold/eject clip and inscription plate	24 V DC	4 CO	LZS:PT5B5L24		
	24 V AC		LZS:PT5B5R24		
	115 V AC		LZS:PT5B5S15		
	230 V AC		LZS:PT5B5T30		
Complete device with plug-in base (push-in spring-type terminals, logical isolation) for snap-on mounting on 35 mm DIN rail, consisting of: plug-in relay, plug-in base with spring-type terminals and logical isolation, LED module (24 V DC LED module with free-wheeling diode, AC without free-wheeling diode), hold/eject clip and inscription plate	24 V DC	2 CO	LZS:PT2D5L24		
	230 V AC		LZS:PT2D5T30		
Complete device with plug-in base (push-in spring-type terminals, logical isolation) for snap-on mounting on 35 mm DIN rail, consisting of: plug-in relay, plug-in base with spring-type terminals and logical isolation, LED module (24 V DC LED module with free-wheeling diode, AC without free-wheeling diode), hold/eject clip and inscription plate	24 V DC	4 CO	LZS:PT5D5L24		
	24 V AC		LZS:PT5D5R24		
	115 V AC		LZS:PT5D5S15		
	230 V AC	LZS:PT5D5T30			
	Complete devices, 8-pole, 5 mm pinning, RT range (15.5 mm width)				
	Complete device with plug-in base (screw terminals, standard) for snap-on mounting on 35 mm DIN rail, consisting of: plug-in relay, standard plug-in base with screw terminals, LED module (24 V DC LED module with free-wheeling diode, AC without free-wheeling diode), hold/eject clip and inscription plate	24 V DC	1 CO	LZS:RT3A4L24	
24 V AC		LZS:RT3A4R24			
115 V AC		LZS:RT3A4S15			
230 V AC		LZS:RT3A4T30			
24 V DC		2 CO	LZS:RT4A4L24		
24 V AC			LZS:RT4A4R24		
115 V AC			LZS:RT4A4S15		
230 V AC	LZS:RT4A4T30				
Complete device with plug-in base (screw terminals, logical isolation) for snap-on mounting on 35 mm DIN rail, consisting of: plug-in relay with safe isolation, plug-in base with screw terminals and logical isolation, LED module (24 V DC LED module with free-wheeling diode, AC without free-wheeling diode), hold/eject clip and inscription plate	24 V DC	1 CO	LZS:RT3B4L24		
	24 V AC		LZS:RT3B4R24		
	115 V AC		LZS:RT3B4S15		
	230 V AC		LZS:RT3B4T30		
	24 V DC	2 CO	LZS:RT4B4L24		
	24 V AC		LZS:RT4B4R24		
	115 V AC		LZS:RT4B4S15		
230 V AC	LZS:RT4B4T30				
Complete device with plug-in base (push-in spring-type terminals, logical isolation) for snap-on mounting on 35 mm DIN rail, consisting of: plug-in relay, plug-in base with spring-type terminals and logical isolation, LED module (24 V DC LED module with free-wheeling diode, AC without free-wheeling diode), hold/eject clip and inscription plate	24 V DC	1 CO	LZS:RT3D4L24		
	24 V AC		LZS:RT3D4R24		
	115 V AC		LZS:RT3D4S15		
	230 V AC		LZS:RT3D4T30		
	24 V DC	2 CO	LZS:RT4D4L24		
	24 V AC		LZS:RT4D4R24		
	115 V AC		LZS:RT4D4S15		
	230 V AC		LZS:RT4D4T30		

Coupling relays with plug-in relays – individual modules for self-assembly (LZX)

RT range

Plug-in relays

Rated control supply voltage U_s	Contacts	LED	Free-wheeling diode	Logical isolation	Hard-gold plating	Article No.
12 V DC	2 CO	–	–	–	–	LZX:RT424012
24 V DC	1 CO	–	–	–	–	LZX:RT314024
24 V DC	2 CO	–	–	–	–	LZX:RT424024
24 V AC	1 CO	–	–	–	–	LZX:RT424524
24 V AC	2 CO	–	–	–	–	LZX:RT424524
24 V AC	1 CO	–	–	–	–	LZX:RT314524
115 V AC	1 CO	–	–	–	–	LZX:RT314615
115 V AC	2 CO	–	–	–	–	LZX:RT424615
230 V AC	1 CO	–	–	–	–	LZX:RT314730
230 V AC	2 CO	–	–	–	–	LZX:RT424730
24 V DC	1 CO	–	–	–	Yes	LZX:RT315024
230 V AC	1 CO	–	–	–	Yes	LZX:RT315730

RT range		
Accessories, suitable for 1 and 2 CO		
Plug-in base with screw terminals for DIN rail mounting	No logical isolation (standard)	LZS:RT78725
	Logical isolation	LZS:RT78726
Plug-in base with push-in spring-type terminals for DIN rail mounting	Logical isolation	LZS:RT7872P
	Hold/eject clip	LZS:RT17016
Inscription plate		LZS:RT17040
Wiring bracket for push-in spring-type terminal base	2-pole	LZS:RT170P1
Wiring comb for screw terminal base	8-pole	LZS:RT170R8

PT range						
Plug-in relays						
Rated control supply voltage U_s	Contacts	LED	Free-wheeling diode	Hard-gold plating	Test bracket	Article No.
24 V DC	2 CO	–	–	–	Yes	LZX:PT270024
24 V DC	3 CO	–	–	–	Yes	LZX:PT370024
24 V DC	4 CO	–	–	–	Yes	LZX:PT570024
24 V DC	4 CO	–	–	–	–	LZX:PT520024
24 V DC	4 CO	–	–	Yes	Yes	LZX:PT580024
24 V AC	2 CO	–	–	–	Yes	LZX:PT270524
24 V AC	3 CO	–	–	–	Yes	LZX:PT370524
24 V AC	4 CO	–	–	–	Yes	LZX:PT570524
115 V AC	2 CO	–	–	–	Yes	LZX:PT270615
115 V AC	3 CO	–	–	–	Yes	LZX:PT370615
115 V AC	4 CO	–	–	–	Yes	LZX:PT570615
230 V AC	2 CO	–	–	–	Yes	LZX:PT270730
230 V AC	3 CO	–	–	–	Yes	LZX:PT370730
230 V AC	4 CO	–	–	–	Yes	LZX:PT570730
230 V AC	4 CO	–	–	Yes	Yes	LZX:PT580730
230 V AC	4 CO	–	–	–	–	LZX:PT520730

Accessories			
Plug-in base with screw terminals for DIN rail mounting	2 CO	No logical isolation	LZS:PT78720
	3 CO		LZS:PT78730
	4 CO		LZS:PT78740
	2 CO	Logical isolation	LZS:PT78722
	4 CO		LZS:PT78742
Plug-in base with push-in spring-type terminals for DIN rail mounting	2 CO	Logical isolation	LZS:PT7872P
	4 CO		LZS:PT7874P
Hold/eject clip	2/3/4 CO	Logical isolation	LZS:PT17021
Hold/eject clip for screw terminal base	2/3/4 CO	No logical isolation	LZS:PT17024
Inscription plate			LZS:PT17040
Wiring bracket for push-in spring-type terminal base		2-pole	LZS:PT170P1
Wiring comb for screw terminal base		6-pole	LZS:PT170R6

Accessories for RT and PT range				
LED module red	Control supply voltage	24 V DC	Free-wheeling diode	LZS:PTML0024
		24 V AC/DC	–	LZS:PTML0524
		110–230 V AC	–	LZS:PTML0730
LED module green		24 V DC	Free-wheeling diode	LZS:PTMG0024
		24 V AC/DC	–	LZS:PTMG0524
		110–230 V AC	–	LZS:PTMG0730
Free-wheeling diode		6–230 V DC	Free-wheeling diode	LZS:PTMT00A0
RC link		24–48 V AC	–	LZS:PTMU0524
		110–230 V AC	–	LZS:PTMU0730

MT range				
Plug-in relays				
Rated control supply voltage U_s	Contacts	LED	Free-wheeling diode	Article No.
24 V DC	3 CO	–	–	LZX:MT321024
24 V DC	3 CO	Yes	–	LZX:MT323024
24 V AC	3 CO	–	–	LZX:MT326024
24 V AC	3 CO	Yes	–	LZX:MT328024
115 V AC	3 CO	–	–	LZX:MT326115
115 V AC	3 CO	Yes	–	LZX:MT328115
230 V AC	3 CO	–	–	LZX:MT326230
230 V AC	3 CO	Yes	–	LZX:MT328230

Accessories	
Plug-in base with screw terminals for DIN rail mounting, 11-pole	LZS:MT78750
Hold clip	LZS:MT28800

SIRIUS 3RS70 Signal Converters

Single-range converter, active, 3-way separation

Input	Output	Width	Manual/auto- matic operation	Supply voltage	Article No.
0 – 10 V	0 – 10 V	6.2 mm	–	24 V AC/DC	3RS7000-□AE00
	0 – 20 mA				3RS7000-□CE00
	4 – 20 mA				3RS7000-□DE00
0 – 20 mA	0 – 10 V				3RS7002-□AE00
	0 – 20 mA				3RS7002-□CE00
	4 – 20 mA				3RS7002-□DE00
4 – 20 mA	0 – 10 V				3RS7003-□AE00
	0 – 20 mA				3RS7003-□CE00
	4 – 20 mA				3RS7003-□DE00

Switchable multi-range converters, active

0 – 10 V	▶	0 – 10 V	6.2 mm	–	24 V AC/DC	3RS7005-□FE00
0 – 20 mA		0 – 20 mA				
4 – 20 mA		4 – 20 mA				
0 – 10 V	▶	0 – 50 Hz	6.2 mm	–	24 V AC/DC	3RS7005-□KE00
0 – 20 mA		0 – 100 Hz				
4 – 20 mA		0 – 1 kHz				
	0 – 10 kHz					

Switchable multi-range converters, active, with manual/automatic switch and setting potentiometer as manual analog signal transmitter

0 – 10 V	▶	0 – 10 V	17.5 mm	Yes	24 V AC/DC	3RS7025-□FE00
0 – 20 mA		0 – 20 mA			24 – 240 V AC/DC	3RS7025-□FW00
4 – 20 mA		4 – 20 mA				

Switchable universal converters, active, with 16 input ranges and 3 output ranges

0 – 60 mV	▶	0 – 10 V 0 – 20 mA 4 – 20 mA	6.2 mm	–	24 V AC/DC	3RS7006-□FE00				
0 – 100 mV										
0 – 300 mV										
0 – 500 mV										
0 – 1 V										
0 – 2 V										
0 – 5 V										
0 – 10 V										
2 – 10 V							17.5 mm	–	24 – 240 V AC/DC	3RS7006-□FW00
0 – 20 V										
0 – 5 mA										
0 – 10 mA										
+/-5 mA										
+/-20 mA										
0 – 20 mA										
4 – 20 mA										

Single-range converters, passive, 2-way separation

4 – 20 mA	4 – 20 mA	6.2 mm	–	Passive converters	3RS7020-□ET00
-----------	-----------	--------	---	--------------------	---------------

Screw terminals 1
Spring-type terminals 2

Accessories for 3RS70 signal converters

Galvanic isolation plate	3RQ3900-0A
2-pole connecting comb	3RQ3901-0A
4-pole connecting comb	3RQ3901-0B
8-pole connecting comb	3RQ3901-0C
16-pole connecting comb	3RQ3901-0D
Clip-on label, 5 x 5 mm, white	3RQ3902-0A

SIRIUS 3TG10 Power Relays / Miniature Contactors

3TG10 power relays/miniature contactors							
AC-1 operating current I_e with 400 V	AC-1 power of three-phase loads with 50 Hz 400 V	AC-2 and AC-3 operating current with 400 V	AC-2 and AC-3 three-phase loads with 50 Hz 400 V	Contacts	Connection system	Rated control supply voltage U_s	Article No.
(A)	(kW)	(A)	(kW)				
20	13	8.4	4	3 NO + 1 NC	Screw terminals	24 V AC	3TG1001-0AC2
						110 V AC	3TG1001-0AG2
						230 V AC	3TG1001-0AL2
						24 V DC	3TG1001-0BB4
20	13	8.4	4	4 NO	Screw terminals	24 V AC	3TG1010-0AC2
						110 V AC	3TG1010-0AG2
						230 V AC	3TG1010-0AL2
						24 V DC	3TG1010-0BB4
16	10	8.4	4	3 NO + 1 NC	Flat connectors	24 V AC	3TG1001-1AC2
						110 V AC	3TG1001-1AG2
						230 V AC	3TG1001-1AL2
						24 V DC	3TG1001-1BB4
16	10	8.4	4	4 NO	Flat connectors	24 V AC	3TG1010-1AC2
						110 V AC	3TG1010-1AG2
						230 V AC	3TG1010-1AL2
						24 V DC	3TG1010-1BB4

Scan the
QR code
for further
information



**Published by
Siemens AG**

Smart Infrastructure
Electrical Products
Werner-von-Siemens-Str. 48–50
92224 Amberg
Germany

**For the U.S. published by
Siemens Industry Inc.**

100 Technology Drive
Alpharetta, GA 30005
United States

For more information,
please contact our
Customer Support Center:
Phone: +49 180 524 70 00
Fax: +49 180 524 24 71
(Charges depending on provider)
E-mail: support.energy@siemens.com

Article No. SIEP-B10003-01-7600
WS 04211.0
© Siemens 2021

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Siemens AG or other companies whose use by third parties for their own purposes could violate the rights of the owners.